
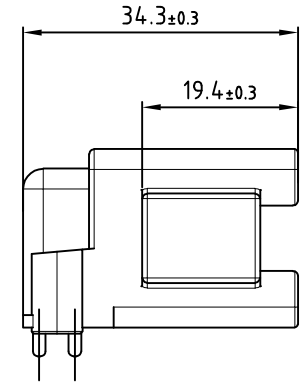
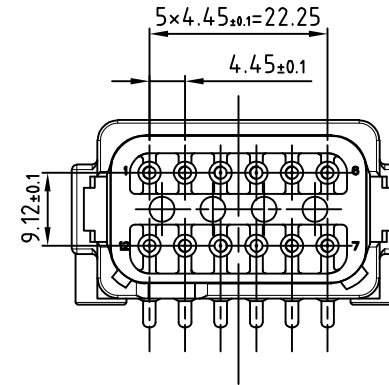
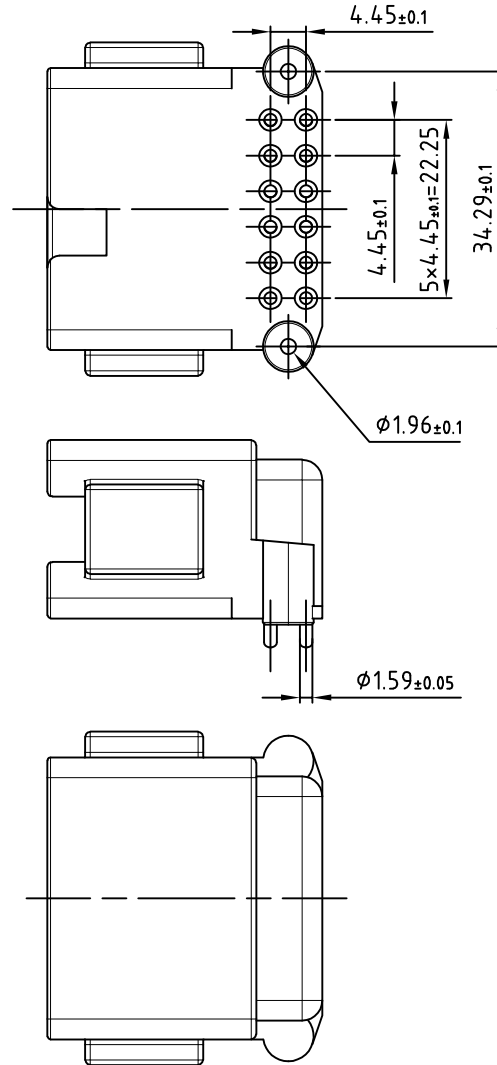


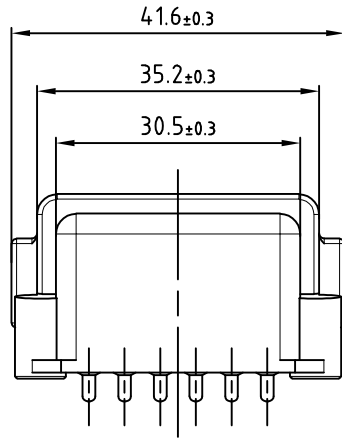

NOTES:

- Rated current (maximum): 13A.
- Working temperature range: -40°C TO $+125^{\circ}\text{C}$.
- Pin plating: Gold over nickle over copper underplate (Sn/Ni/Cu)
entire length of pin(RoHS COMPLIANT).
- UL Flame resistance rating: UL-94 V0
- Electrical characteristics:
Working voltage (VDC): 250
Working voltage (VAC): 250
Rated voltage configuration (V): 12 | 24

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO., LTD

					Name	Connector
					DrawingNo	XTF13-12PA-G003
					Material	PA66+GF15
Design	Lai	2025.10	Revision	01	Color	Gray
Proofread	Yang	2025.10			Weight Kg	
Approval	Zhang	2025.10	Scale	1.5:1		Pages