

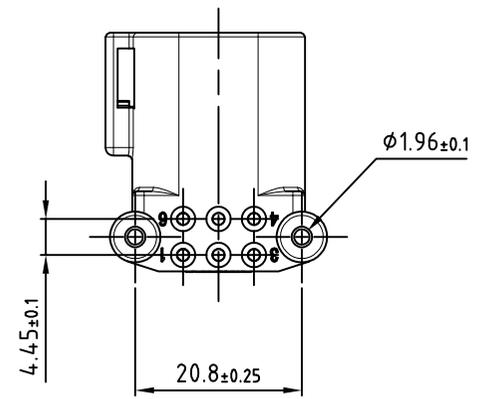
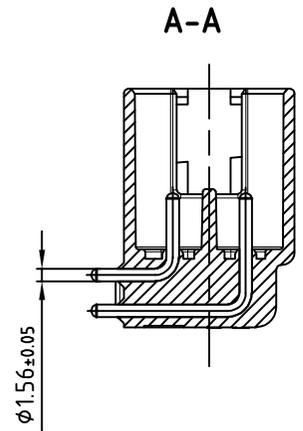
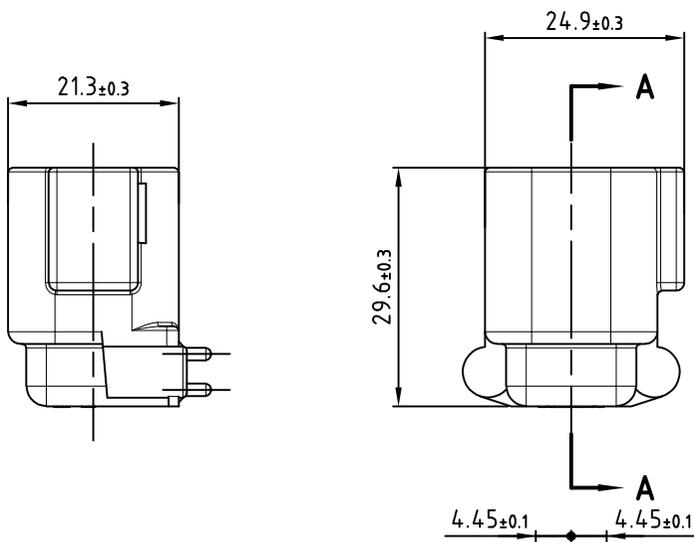


1 2 3 4 5 6 7 8

A
B
C
D
E
F



NOTES:

1. Rated current (maximum): 13A.
2. Working temperature range: -40℃ TO +125℃.
3. Pin plating: Gold over nickle over copper underplate (Sn/Ni/Cu) entire length of pin(RoHS COMPLIANT).
4. UL Flame resistance rating: UL-94 V0
5. Electrical characteristics:
 Working voltage (VDC): 250
 Working voltage (VAC): 250
 Rated voltage configuration (V): 12 | 24

宁波翔洋电气有限公司 NINGBO XF ELECTRONIC CO., LTD					Name		Connector	
					DrawingNo		XTF13-6P-G003	
		Material		PA66+GF15				
Design	Zhang	2026.2	Revision	01	Color	Black		
Proofread	Yang	2026.2			Weight Kg			
Approval	Zhang	2026.2	Scale	1.5:1		Pages		

1 2 3 4 5 6 7 8