

1 2 3 4 5 6 7 8

A








B

C

D

E

F

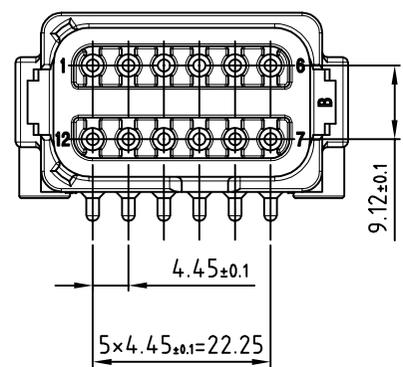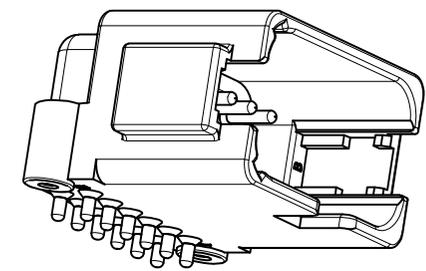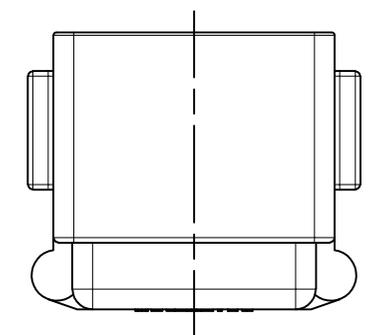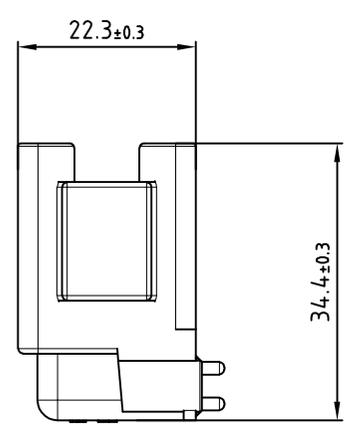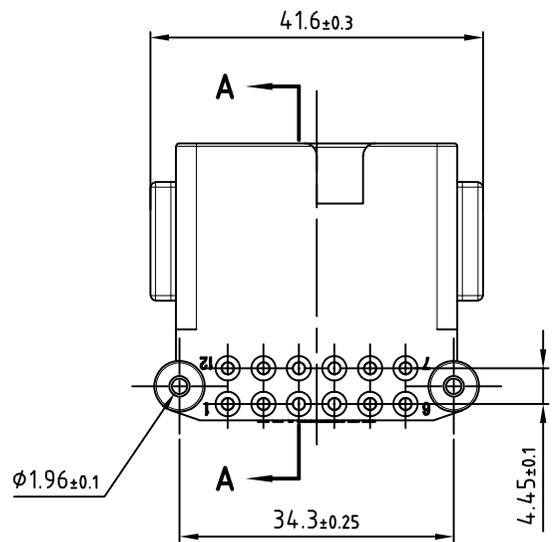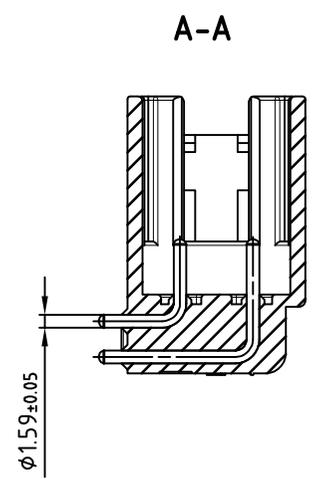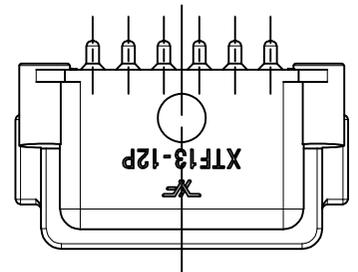

NOTES:

1. Rated current (maximum): 13A.
2. Working temperature range: -40℃ TO +125℃.
3. UL Flame resistance rating: UL-94 V0
4. Electrical characteristics:
 Working voltage (VDC): 250
 Working voltage (VAC): 250
5. Rated voltage configuration (V): 12 | 24
6. Pin plating: Tin over nickel over copper underplate (Sn/Ni/Cu) entire length of pin (RoHS COMPLIANT).

| | | | | | | | | |
|---|-------|----------|----------|-----------|-----------|-------|------------|--|
| 宁波翔洋电气有限公司 NINGBO XF ELECTRONIC CO., LTD | | | | | Name | | Connector | |
| | | | | | DrawingNo | | XTF13-12PB | |
| | | Material | | PA66+GF15 | | | | |
| Design | Lai | 2025.10 | Revision | 01 | Color | Black | | |
| Proofread | Yang | 2025.10 | | | Weight Kg | | | |
| Approval | Zhang | 2025.10 | Scale | 1.5:1 | Pages | | | |

1 2 3 4 5 6 7 8