
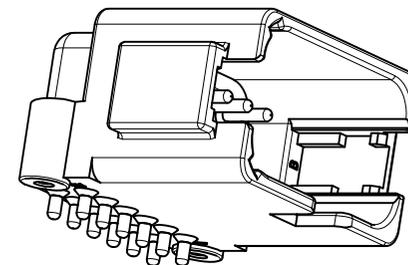
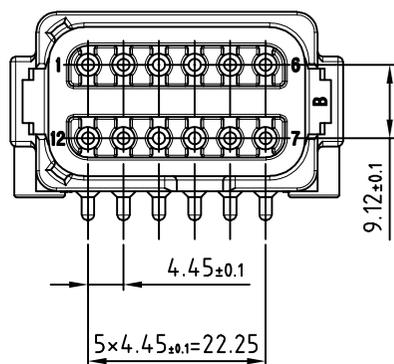

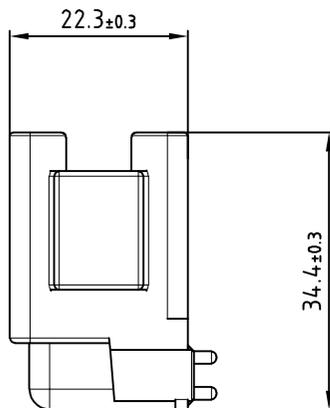
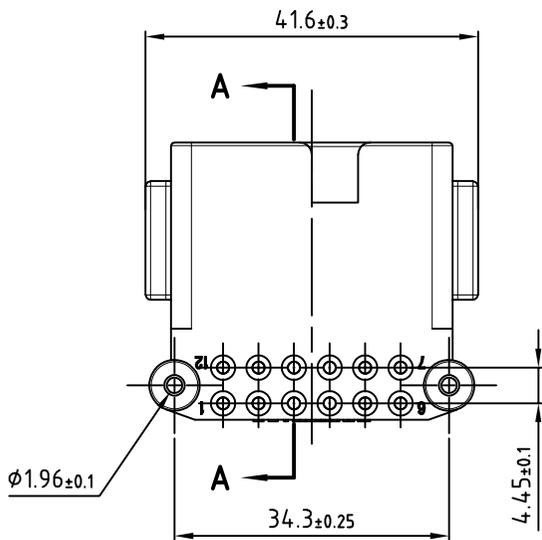


A-A

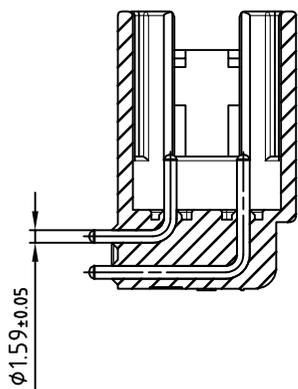

注:

- 1、端子额定电流(最大值)(A):13A
- 2、工作温度:-40℃~125℃
- 3、端子接触部电镀材料:金
- 4、UL阻燃性等级:UL-94 V0
- 5、电气特征:工作电压(VDC):250

工作电压(VAC):250

标称电压架构(V):12|24

宁波翔洋电气有限公司
NINGBO XF ELECTRONIC CO., LTD

				名称	连接件		
				型号	XTF13-12PB-G003		
				材料	PA66+GF15		
				颜色	黑色		
设计	Zhang	2025.10	标准化	重量			
校对	Yang	2025.10		阶段标记	版次	01	
审核	Zhang	2025.10	比例	1.5:1	页数		
未注公差: XX.X ±0.2;					A		

