


NOTES:

- Rated current (maximum): 13A.
- Working temperature range: -40°C TO $+125^{\circ}\text{C}$.
- UL Flame resistance rating: UL-94 V0
- Electrical characteristics:
 Working voltage (VDC): 250
 Working voltage (VAC): 250
- Rated voltage configuration (V): 12 | 24
- Pin plating: Tin over nickle over copper underplate (Sn/Ni/Cu) entire length of pin (RoHS COMPLIANT).

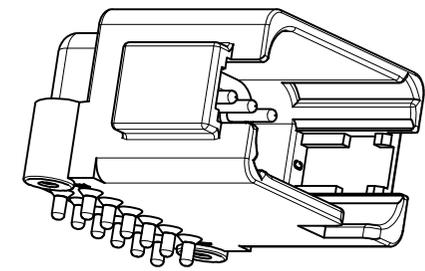

 宁波翔洋电气有限公司 NINGBO XF ELECTRONIC CO., LTD					Name		Connector	
					DrawingNo		XTF13-12PC	
		Material		PA66+GF15				
Design		Lai	2025.10	Revision	01	Color		Green
Proofread		Yang	2025.10			Weight Kg		
Approval		Zhang	2025.10	Scale	1.5:1	 Pages		