


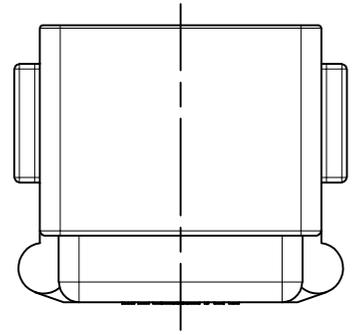
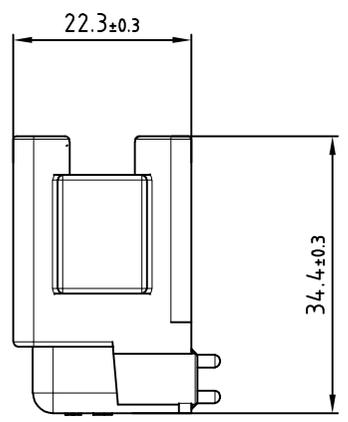


1 2 3 4 5 6 7 8

A

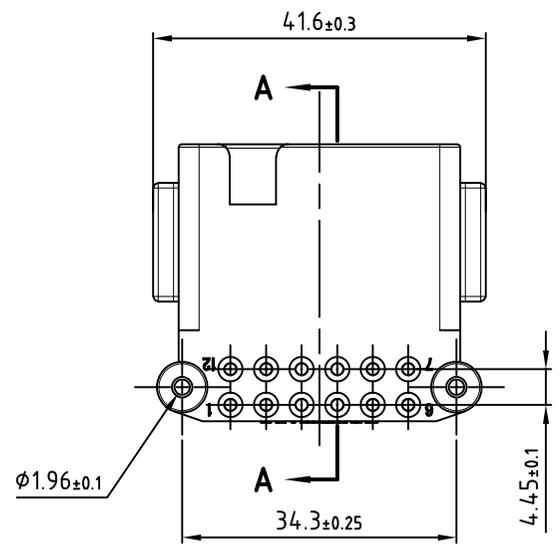

B


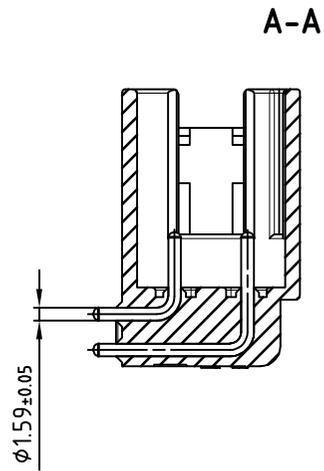


C

D

**NOTES:**

1. Rated current (maximum): 13A.
2. Working temperature range: -40℃ TO +125℃.
3. UL Flame resistance rating: UL-94 V0
4. Electrical characteristics:  
Working voltage (VDC): 250  
Working voltage (VAC): 250
5. Rated voltage configuration (V): 12 | 24
6. Pin plating: Tin over nickel over copper underplate (Sn/Ni/Cu) entire length of pin (RoHS COMPLIANT).

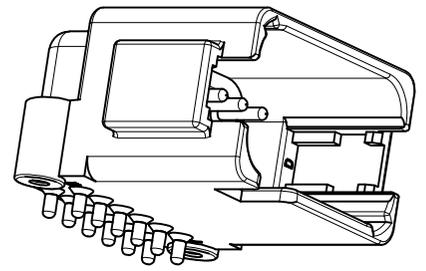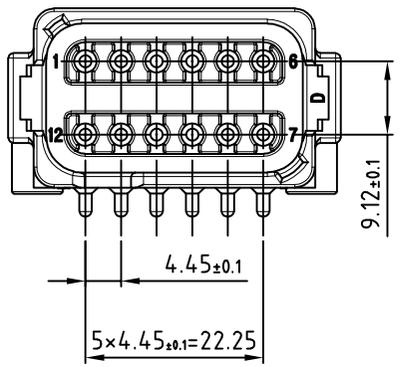

F

<b>宁波翔洋电气有限公司</b> NINGBO XF ELECTRONIC CO., LTD					Name		Connector	
					DrawingNo		XTF13-12PD	
		Material		PA66+GF15				
Design	Lai	2025.10	Revision	01	Color	Brown		
Proofread	Yang	2025.10			Weight Kg			
Approval	Zhang	2025.10	Scale	1.5:1		Pages		

1 2 3 4 5 6 7 8