


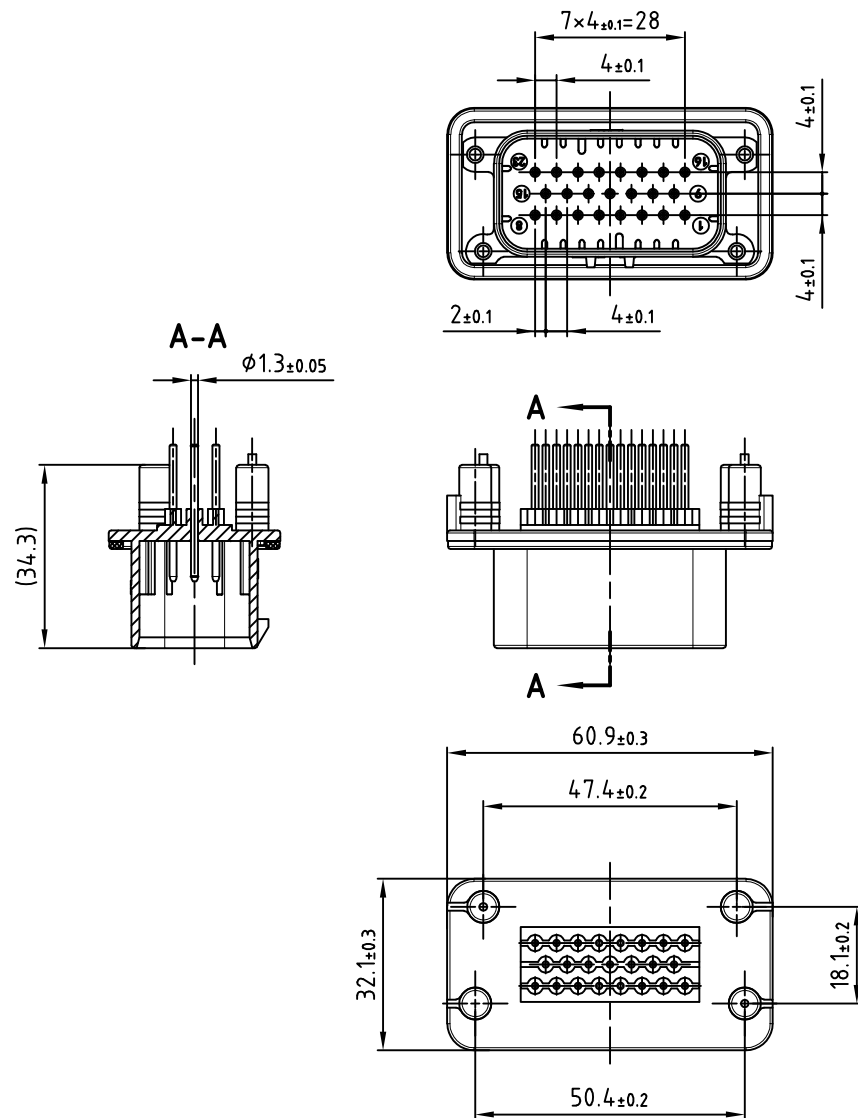

NOTES:

- 1.Rated current (maximum): 17A.
- 2.Working temperature range: -40℃ TO +105℃.
- 3.UL Flame resistance rating:UL-94 V0.
- 4.Pin plating: Tin over nickle over copper underplate (Sn/Ni/Cu) entire length of pin(RoHS COMPLIANT).

宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO.,LTD

					Name	Connector
					DrawingNo	XF7232-1.3-11Bk
					Material	PBT+GF
Design	Lai	2026.2	Revision	01	Color	Black
Proofread	Yang	2026.2			Weight Kg	
Approval	Zhang	2026.2	Scale	1:1		Pages