

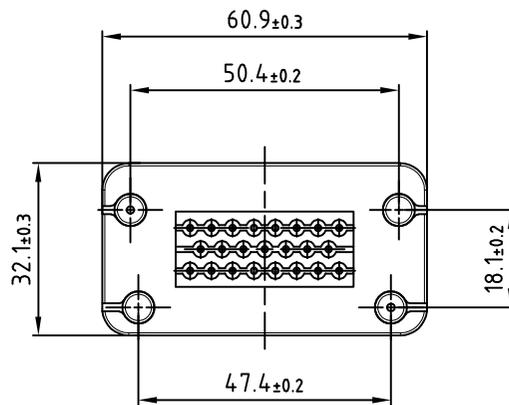






1 2 3 4 5 6 7 8

A  
B  
C  
D  
E  
F

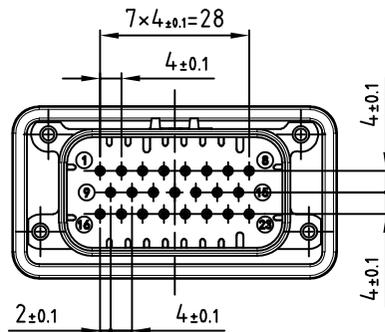

NOTES:

1. Rated current (maximum): 17A.
2. Working temperature range: -40°C TO +105°C.
3. UL Flame resistance rating: UL-94 V0.
4. Pin plating: Tin over nickle over copper underplate (Sn/Ni/Cu) entire length of pin (RoHS COMPLIANT).

 <b>宁波翔洋电气有限公司</b> NINGBO XF ELECTRONIC CO., LTD					Name		Connector	
					DrawingNo		XF7232-1.3-11blu	
Design		Lai	2026.2	Revision	01	Material		PBT+GF
Proofread		Yang	2026.2			Color		Blue
Approval		Zhang	2026.2	Scale	1:1	Weight Kg		
						 Pages		

1 2 3 4 5 6 7 8