

1 2 3 4 5 6 7 8

A

A

B

B

C

C

D




D

E

E

F

F

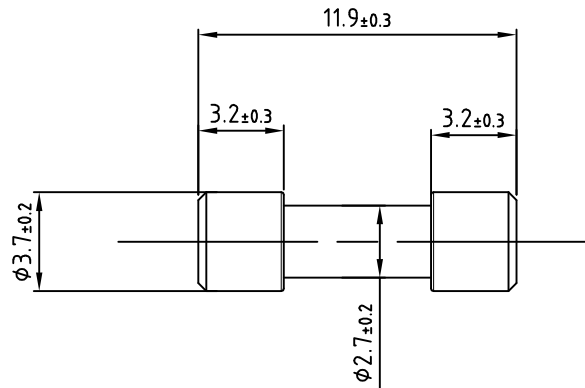

注:

- 1、工作温度:-40℃~125℃
- 2、UL阻燃性等级:UL-94 V2

| | | | | | | | | |
|--|-------|--------|-----|---|------|----------------|----|--|
|  宁波翔洋电气有限公司 NINGBO XF ELECTRONIC CO., LTD | | | | | 名称 | 堵头 | | |
| | | | | | 型号 | XF225-0017-000 | | |
| | | | | | 材料 | PBT+GF20 | | |
| 设计 | Zhang | 2026.3 | 标准化 | | 颜色 | 蓝色 | | |
| 校对 | Yang | 2026.3 | | | 重量 | | | |
| 审核 | Zhang | 2026.3 | 比例 | 5:1 | 阶段标记 | 版次 | 01 | |
| 未注公差: XX.X ±0.2; | | | |  | A | | 页数 | |

1 2 3 4 5 6 7 8