

A
B
C
D
E
F

A

B

C

D

E

F

A
B
C
D
E
F

A







B

C

D

E

F

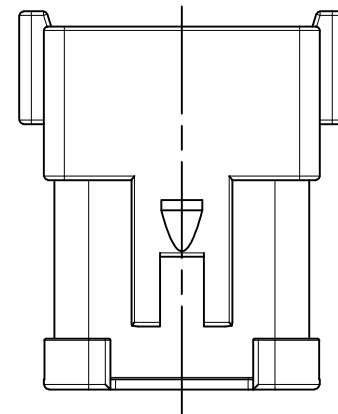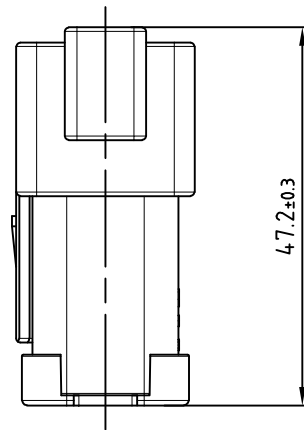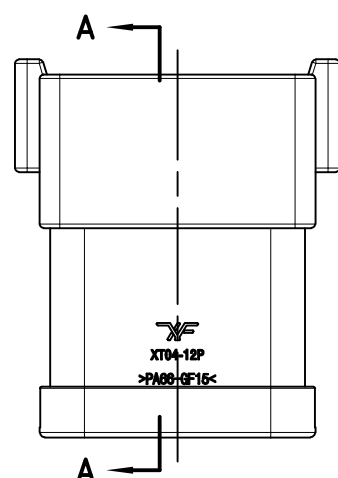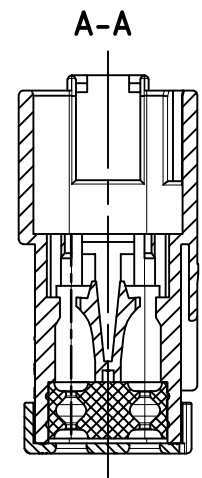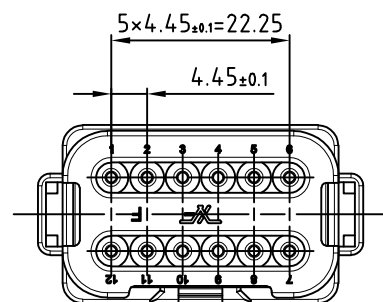

NOTES:

- 1.Rated current (maximum): 13A.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.Moisture resistance:IP68,IP6K9K.
- 4.UL Flame resistance rating:UL-94 V0
- 5.Electrical characteristics:
Working voltage (VDC):250
Working voltage (VAC):250
Rated voltage configuration (V):12 | 24 | 48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XT04-12PA-E003	
					Material	PA66+GF15	
Design	Lai	2025.7	Revision	01	Color	Gray	
Proofread	Yang	2025.7			Weight Kg		
Approval	Zhang	2025.7	Scale	1.5:1		Pages	