
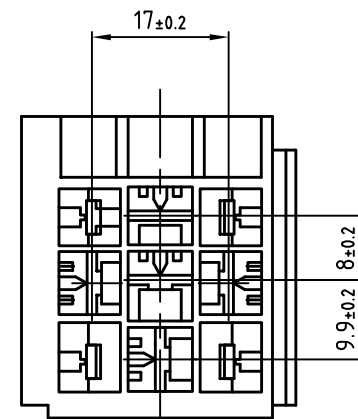


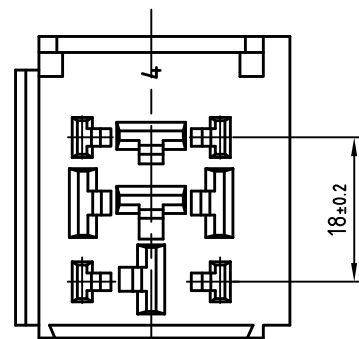
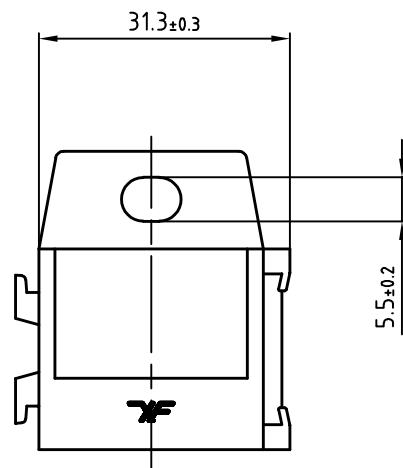


A
B
C
D
E
F

1 2 3 4 5 6 7 8

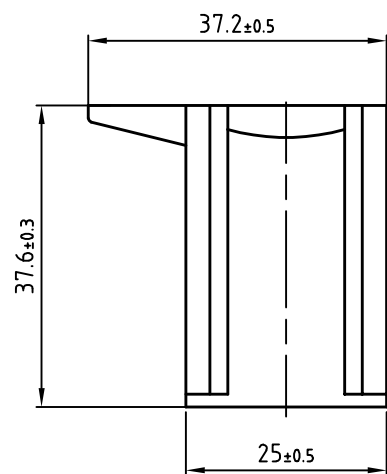

注:

- 1、工作温度:-40℃~125℃
- 2、UL阻燃性等级:UL-94 HB

 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO., LTD					名称	连接件		
					型号	XFJ7091-2.8&6.3-21		
设计	Yang	2026.5	标准化		材料	PA66+GF20		
					颜色	黑色		
校对	Yang	2026.5			重量			
审核	Zhang	2026.5	比例	1.5:1	阶段标记	版次	01	
未注公差: XX.X ±0.2;					A	页数		

1 2 3 4 5 6 7 8