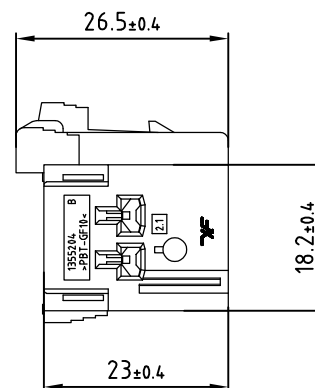
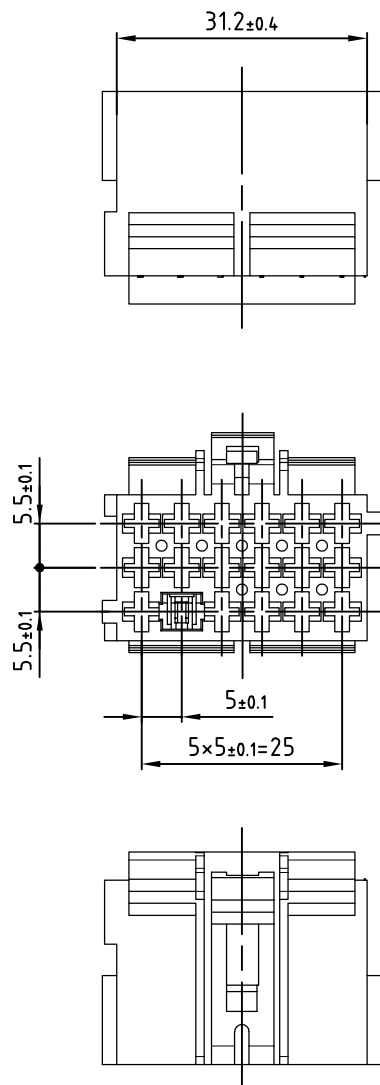



NOTES:

- 1.Rated current (maximum): 30A.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.UL Flame resistance rating:UL-94 HB
- 4.Electrical characteristics:
Working voltage (VDC):28
Rated voltage configuration (V):12

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO.,LTD

					Name	Connector
					DrawingNo	XF7171-2.8-21Rd
					Material	PBT+GF
Design	Yang	2026.5	Revision	01	Color	Red
Proofread	Yang	2026.5			Weight Kg	
Approval	Zhang	2026.5	Scale	1.5:1		Pages