


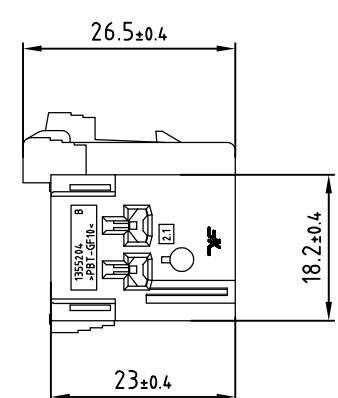
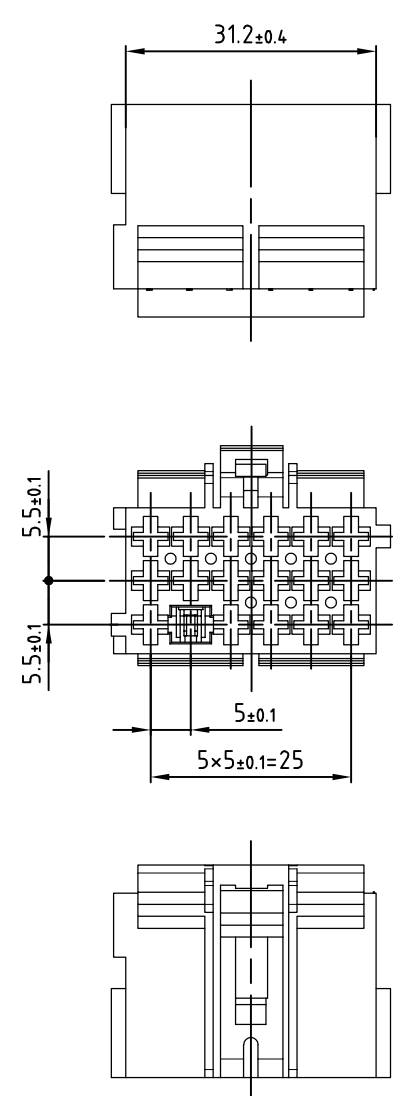


A
B
C
D
E
F



注:

1、端子额定电流 (最大值) (A):30A

2、工作温度:-40℃~125℃

3、UL阻燃性等级:UL-94 HB

4、电气特征:工作电压 (VDC):28

标称电压架构 (V):12

 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					名 称	连接件			
					型 号	XF7171-2.8-21bk			
					材 料	PBT+GF			
设 计	Yang	2026.5	标准化		颜 色	黑色			
校 对	Yang	2026.5			重 量				
审 核	Zhang	2026.5	比 例	1.5:1	阶段标记		版 次	01	
未注公差: XX.X ±0.2;					A			页 数	
		6		7				8	