
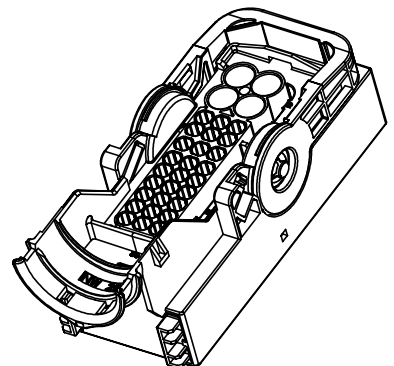
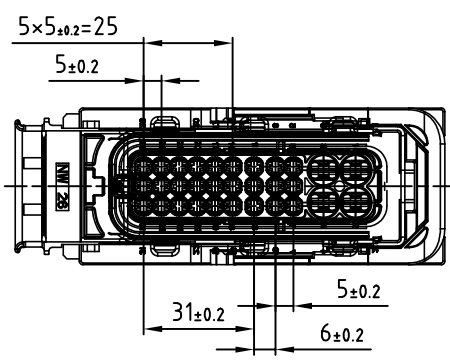

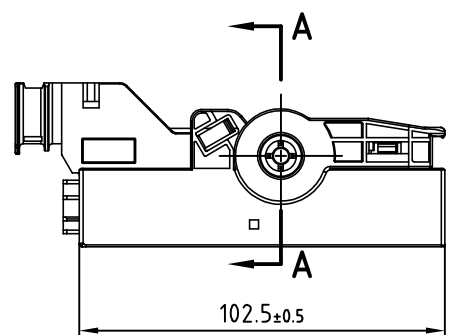



A
B
C
D
E
F

A-A

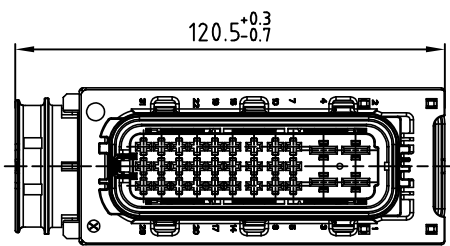

NOTES:

- 1.Rated current (maximum): 29|45A.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.Moisture resistance:IP67,IP6K9K.
- 4.UL Flame resistance rating:UL-94 HB
- 5.Electrical characteristics:
Working voltage (VDC):36
Rated voltage configuration (V):12

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector		
					DrawingNo	XF1-1564297-6		
					Material	PBT+GF		
Design	Zhang	2025.3	Revision	01	Color	Purple		
Proofread	Yang	2025.3			Weight Kg			
Approval	Zhang	2025.3	Scale	1:1.5		Pages		