

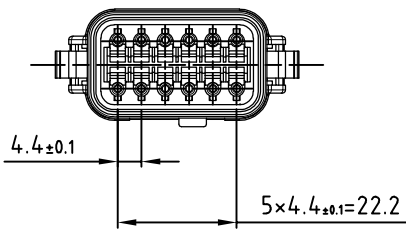
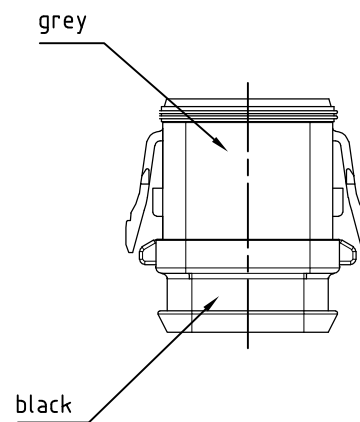





A
B
C
D
E
F

1 2 3 4 5 6 7 8

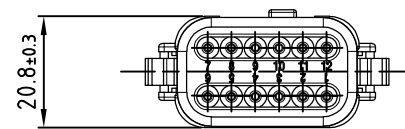

NOTES:

- 1.Rated current (maximum): 13A.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.Moisture resistance:IP68,IP6K9K.
- 4.UL Flame resistance rating:UL-94 V0
- 5.Electrical characteristics:
Working voltage(VDC):250
Working voltage(VAC):250
Rated voltage configuration(V):12 | 24 | 48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector		
					DrawingNo	XT06-12SA-CE13		
					Material	PA66+GF15		
Design	Zhang	2026.5	Revision	01	Color	Grey		
Proofread	Yang	2026.5			Weight Kg			
Approval	Zhang	2026.5	Scale	1:1		Pages		

1 2 3 4 5 6 7 8