

A

B

C

D

E

F

A


B

C







D

E

F

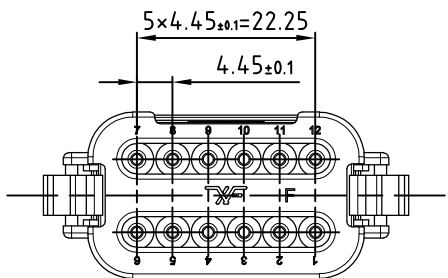

A-A

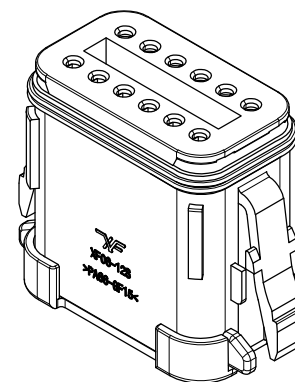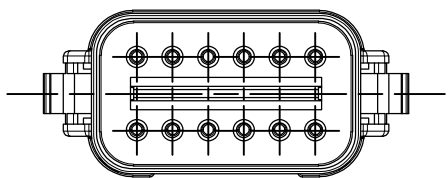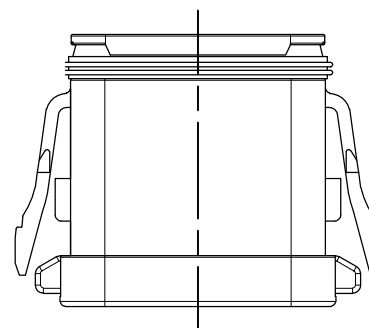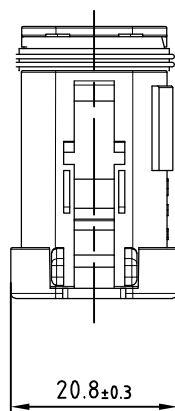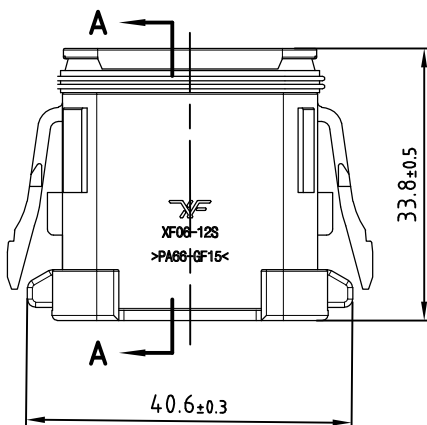

注:

- 1、端子额定电流(最大值)(A):13A
- 2、工作温度:-40℃~125℃
- 3、防水:IP68、IP6K9K
- 4、UL阻燃性等级:UL-94 V0
- 5、电气特征:工作电压(VDC):250

工作电压(VAC):250

标称电压架构(V):12|24|48

宁波翔沅电气有限公司
NINGBO XF ELECTRONIC CO.,LTD

设计	Zhang	2025.6	标准化	
校对	Yang	2025.6		
审核	Zhang	2025.6	比例	1.5:1
未注公差: XX.X ±0.2;				

名称	连接件		
型号	XT06-12SA-C017		
材料	PA66+GF15		
颜色	灰色		
重量			
阶段标记	版次	01	
A	页数		