

A

A

B

B

C

C

D








D

E

E

F

F

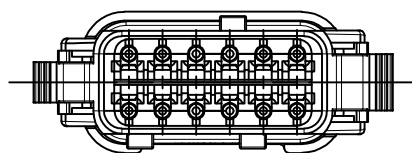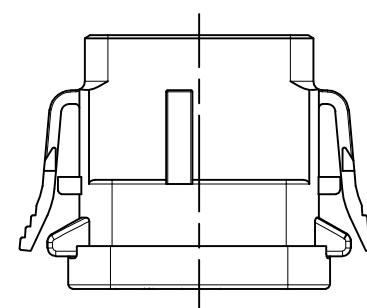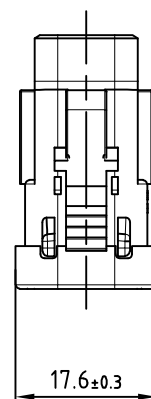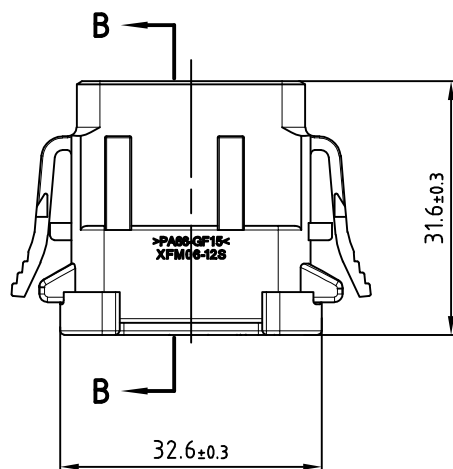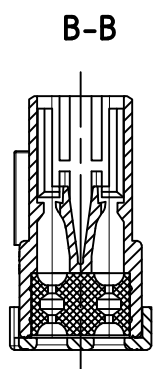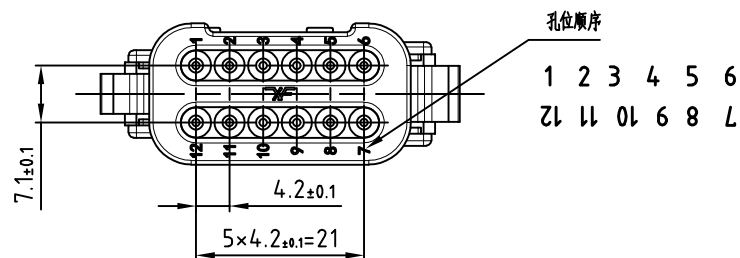

NOTES:

- 1.CURRENT RATING: 7.5A MAXIMUM.
- 2.OPERATING TEMPERATURE: -40℃ TO +125℃.
- 3.MOISTURE RESISTANCE:IP68,IP6K9K.
- 4.UL Flame Resistance Rating:UL-94 V0
- 5.Electrical characteristics:
Working voltage (VDC):250
Working voltage (VAC):250
Rated voltage configuration V):12 | 24 | 48

宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO.,LTD

					Name	Connector
					DrawingNo	XTM06-12SB-E003
					Material	PA66+GF15
Design	Lai	2025.7	Revision	01	Color	Grey
Proofread	Yang	2025.7			Weight Kg	
Approval	Zhang	2025.7	Scale	1.5:1	Pages	