

A








B

C

D

E

F

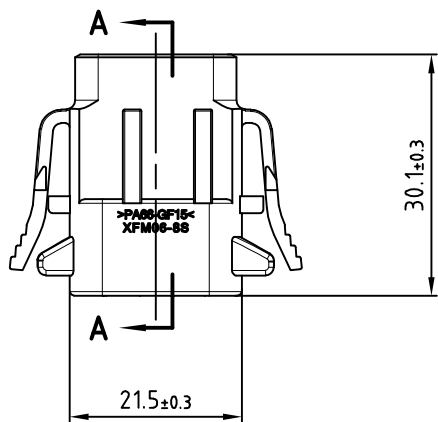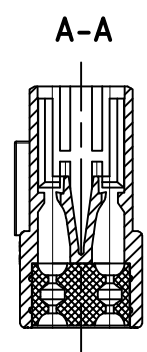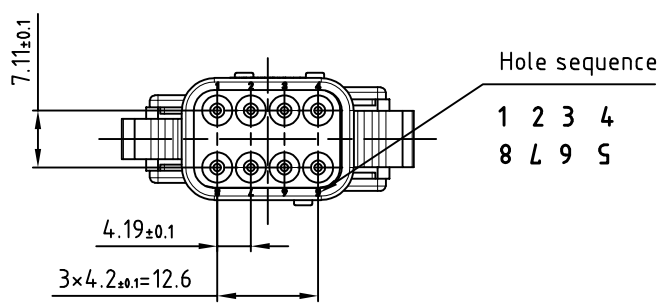

NOTES:

- 1.CURRENT RATING: 7.5A MAXIMUM.
- 2.OPERATING TEMPERATURE: -40℃ TO +125℃.
- 3.MOISTURE RESISTANCE:IP68,IP6K9K.
- 4.UL Flame Resistance Rating:UL-94 V0
- 5.Electrical characteristics:
Working voltage (VDC):250
Working voltage (VAC):250
Rated voltage configuration V):12 | 24 | 48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name		Connector	
					DrawingNo		XTM06-08SA-E004	
					Material		PA66+GF15	
Design	Lai	2025.7	Revision	01	Color		Black	
Proofread	Yang	2025.7			Weight Kg			
Approval	Zhang	2025.7	Scale	1.5:1			Pages	

A

B

C

D

E

F