



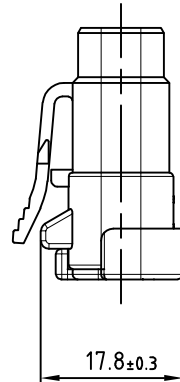
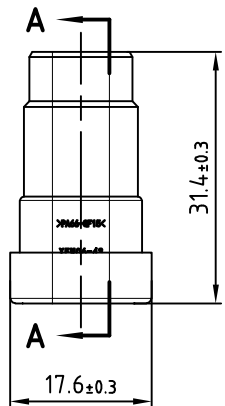
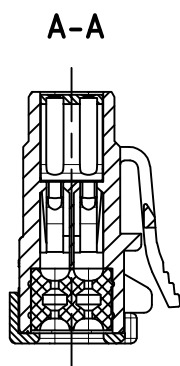


A
B
C
D
E
F



NOTES:
1.Rated current (maximum): 7.5A.
2.Working temperature range: -40℃ TO +125℃.
3.Moisture resistance:IP68,IP6K9K.
4.UL Flame resistance rating:UL-94 V0
5.Electrical characteristics:
Working voltage (VDC):250
Working voltage (VAC):250
Rated voltage configuration (V):12

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XTM06-4S-C017	
					Material	PA66+GF15	
Design	Lai	2025. 11	Revision	01	Color	Grey	
Proofread	Yang	2025. 11			Weight Kg		
Approval	Zhang	2025. 11	Scale	1.5:1		Pages	