

1 2 3 4 5 6 7 8

A

B

C

D

E

F

A


B

C







D

E

F

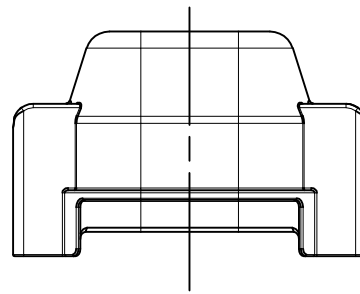

A-A

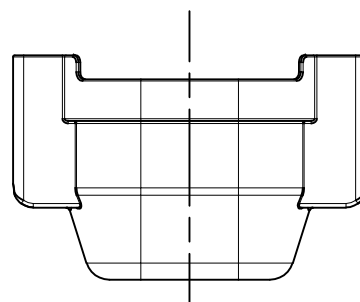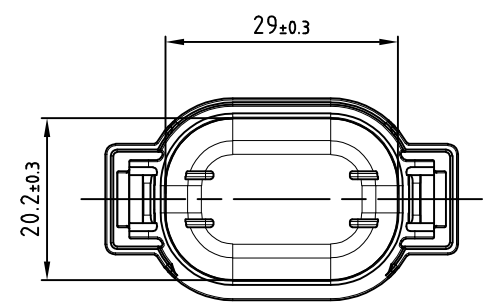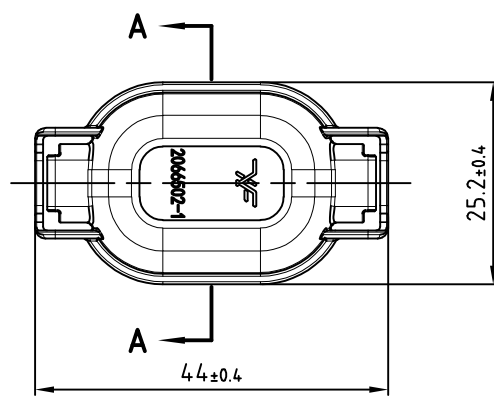

NOTES:

- 1.Working temperature range: -40℃ TO +125℃.
- 2.UL Flame resistance rating:UL-94 HB

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XF2066502-1	
					Material	PBT	
Design	Lai	2026.5	Revision	01	Color	Black	
Proofread	Yang	2026.5			Weight Kg		
Approval	Zhang	2026.5	Scale	1.5:1		Pages	

1 2 3 4 5 6 7 8