


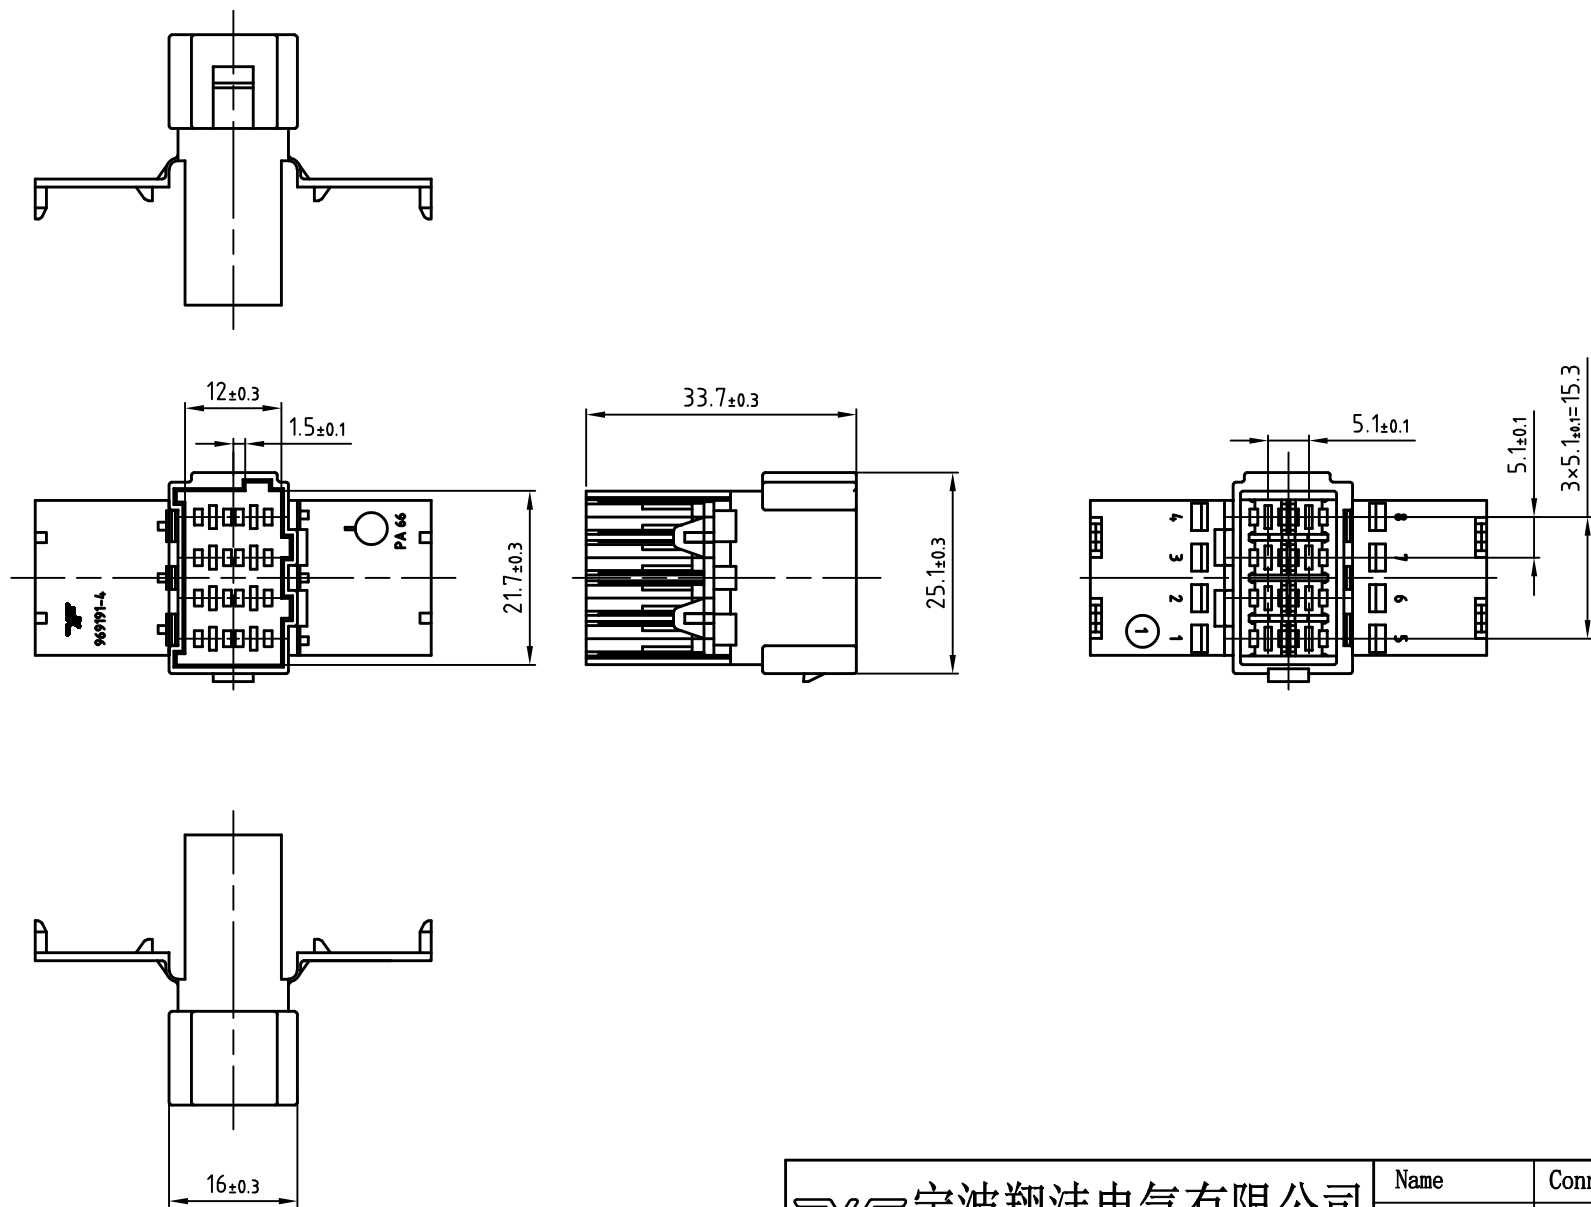

NOTES:

- Rated current (maximum): 30A.
- Working temperature range: -40°C TO $+120^{\circ}\text{C}$.
- Rated voltage configuration (V): 12 | 24

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO., LTD					Name		Connector	
					DrawingNo		XF7082-2.8-11Br	
					Material		PA66 SK45 NC	
Design	Yang	2025.10	Revision	01	Color		Brown	
Proofread	Yang	2025.10			Weight Kg			
Approval	Zhang	2025.10	Scale	3:1			Pages	