


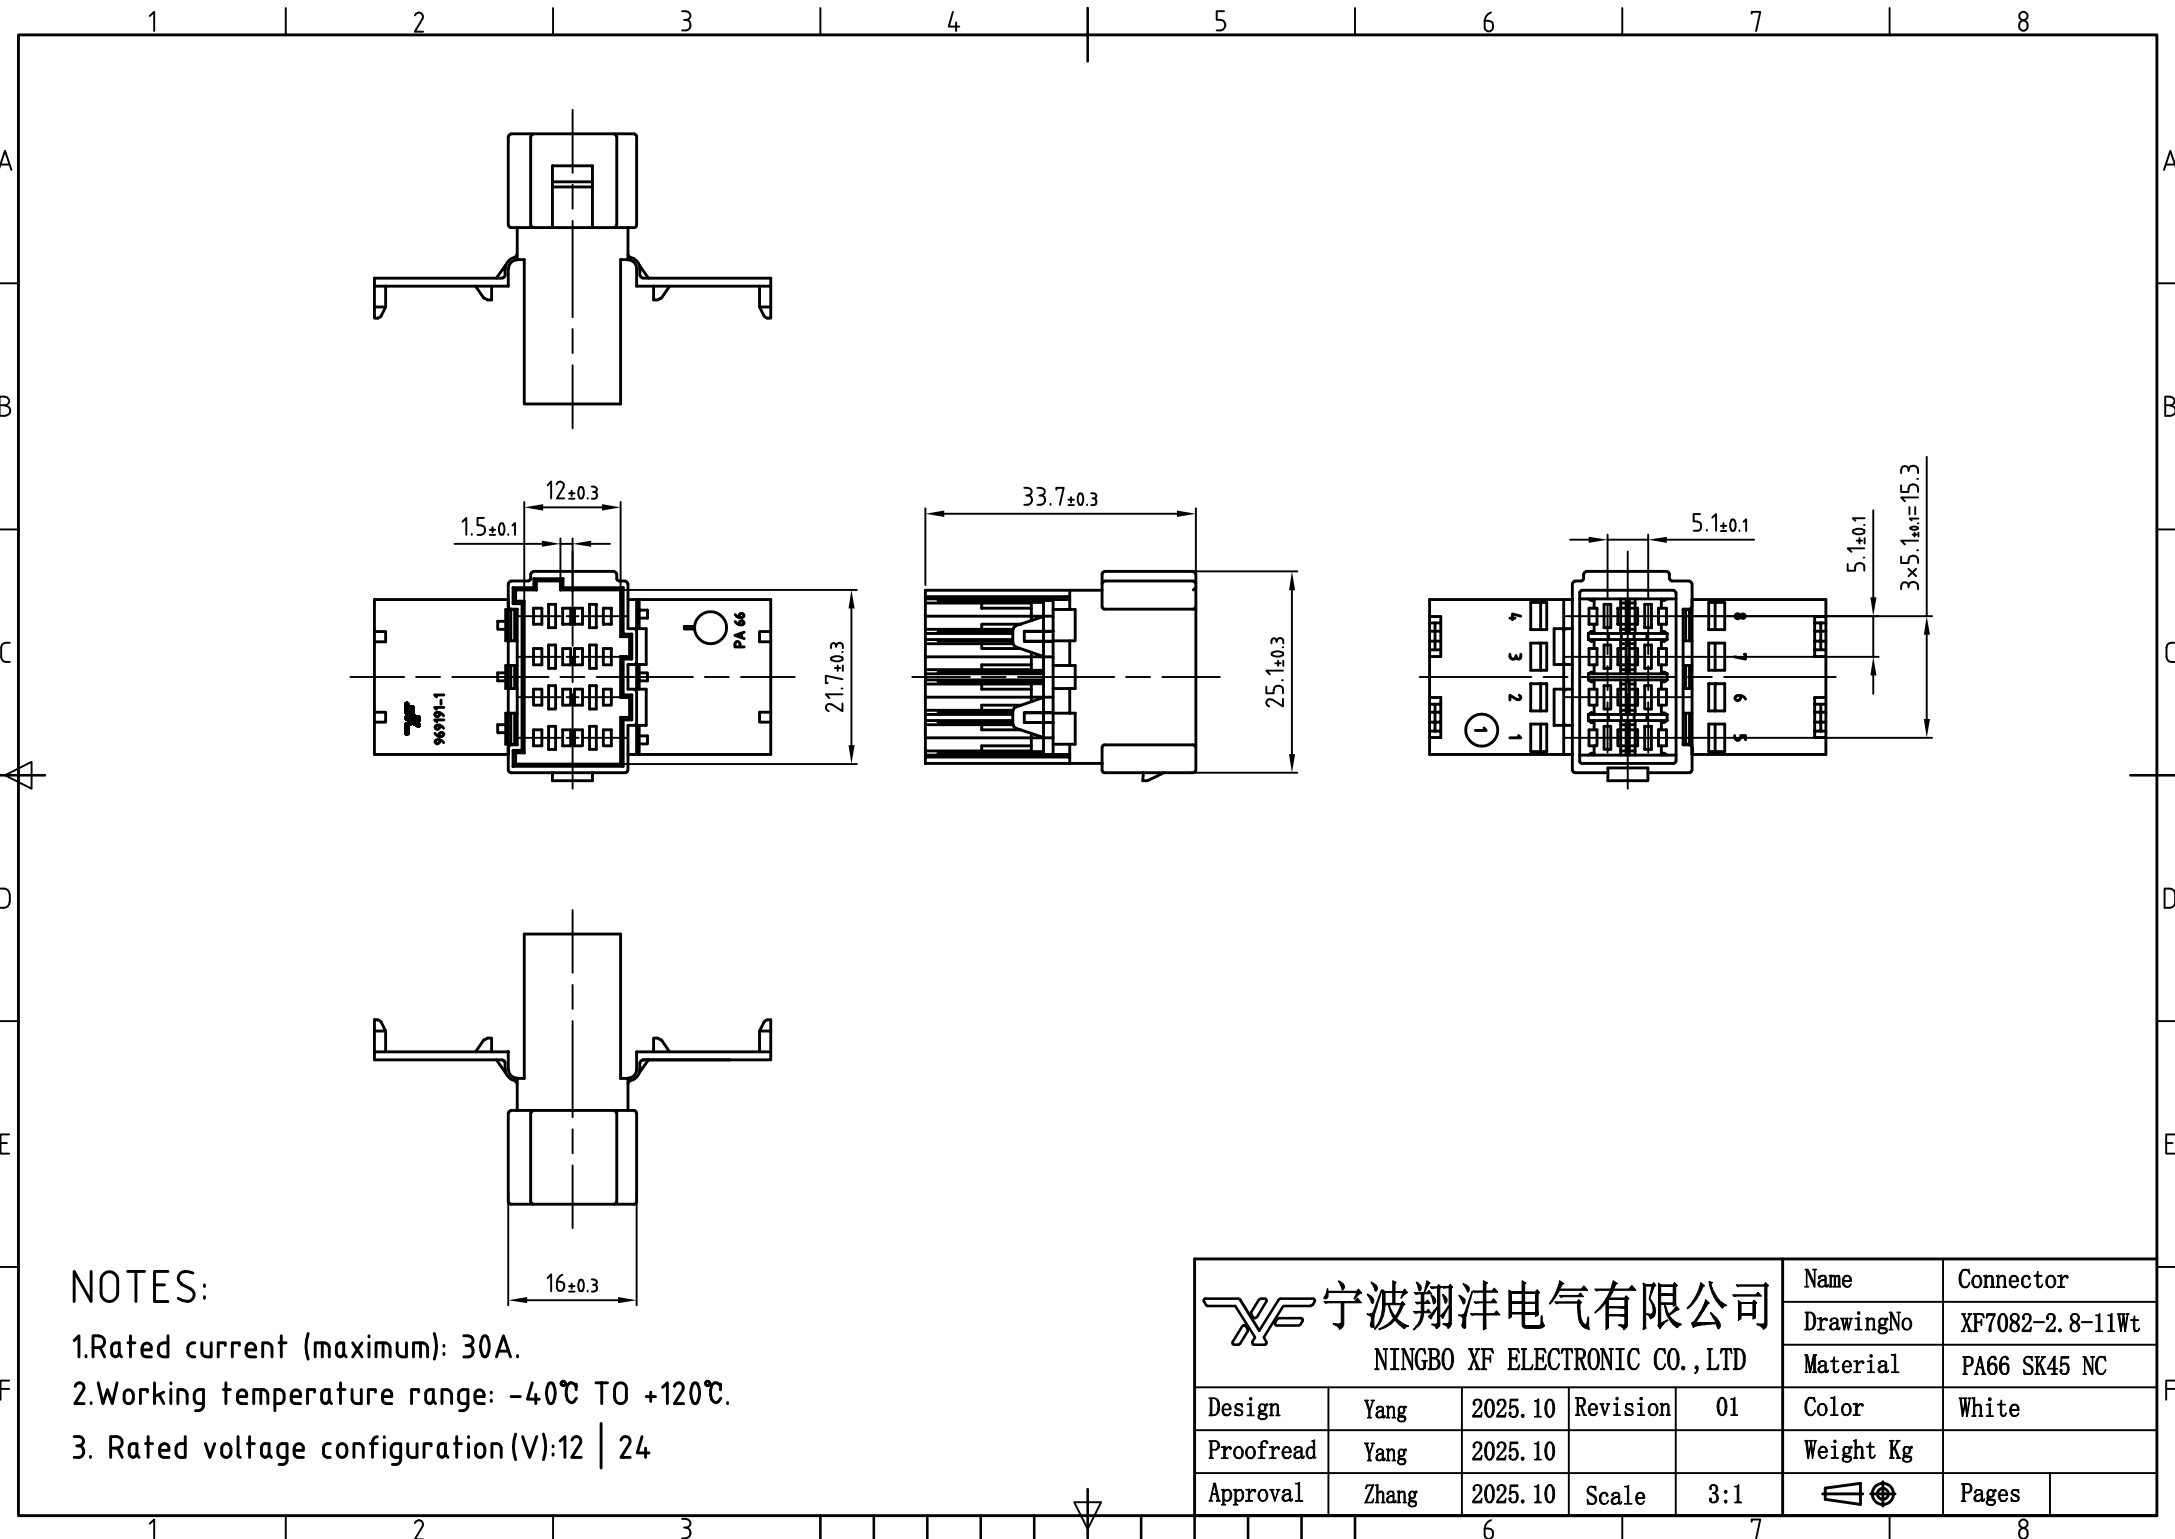

NOTES:

- 1.Rated current (maximum): 30A.
- 2.Working temperature range: -40°C TO $+120^{\circ}\text{C}$.
3. Rated voltage configuration (V): 12 | 24

 宁波翔洋电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XF7082-2. 8-11Wt	
					Material	PA66 SK45 NC	
Design	Yang	2025. 10	Revision	01	Color	White	
Proofread	Yang	2025. 10			Weight Kg		
Approval	Zhang	2025. 10	Scale	3:1		Pages	