


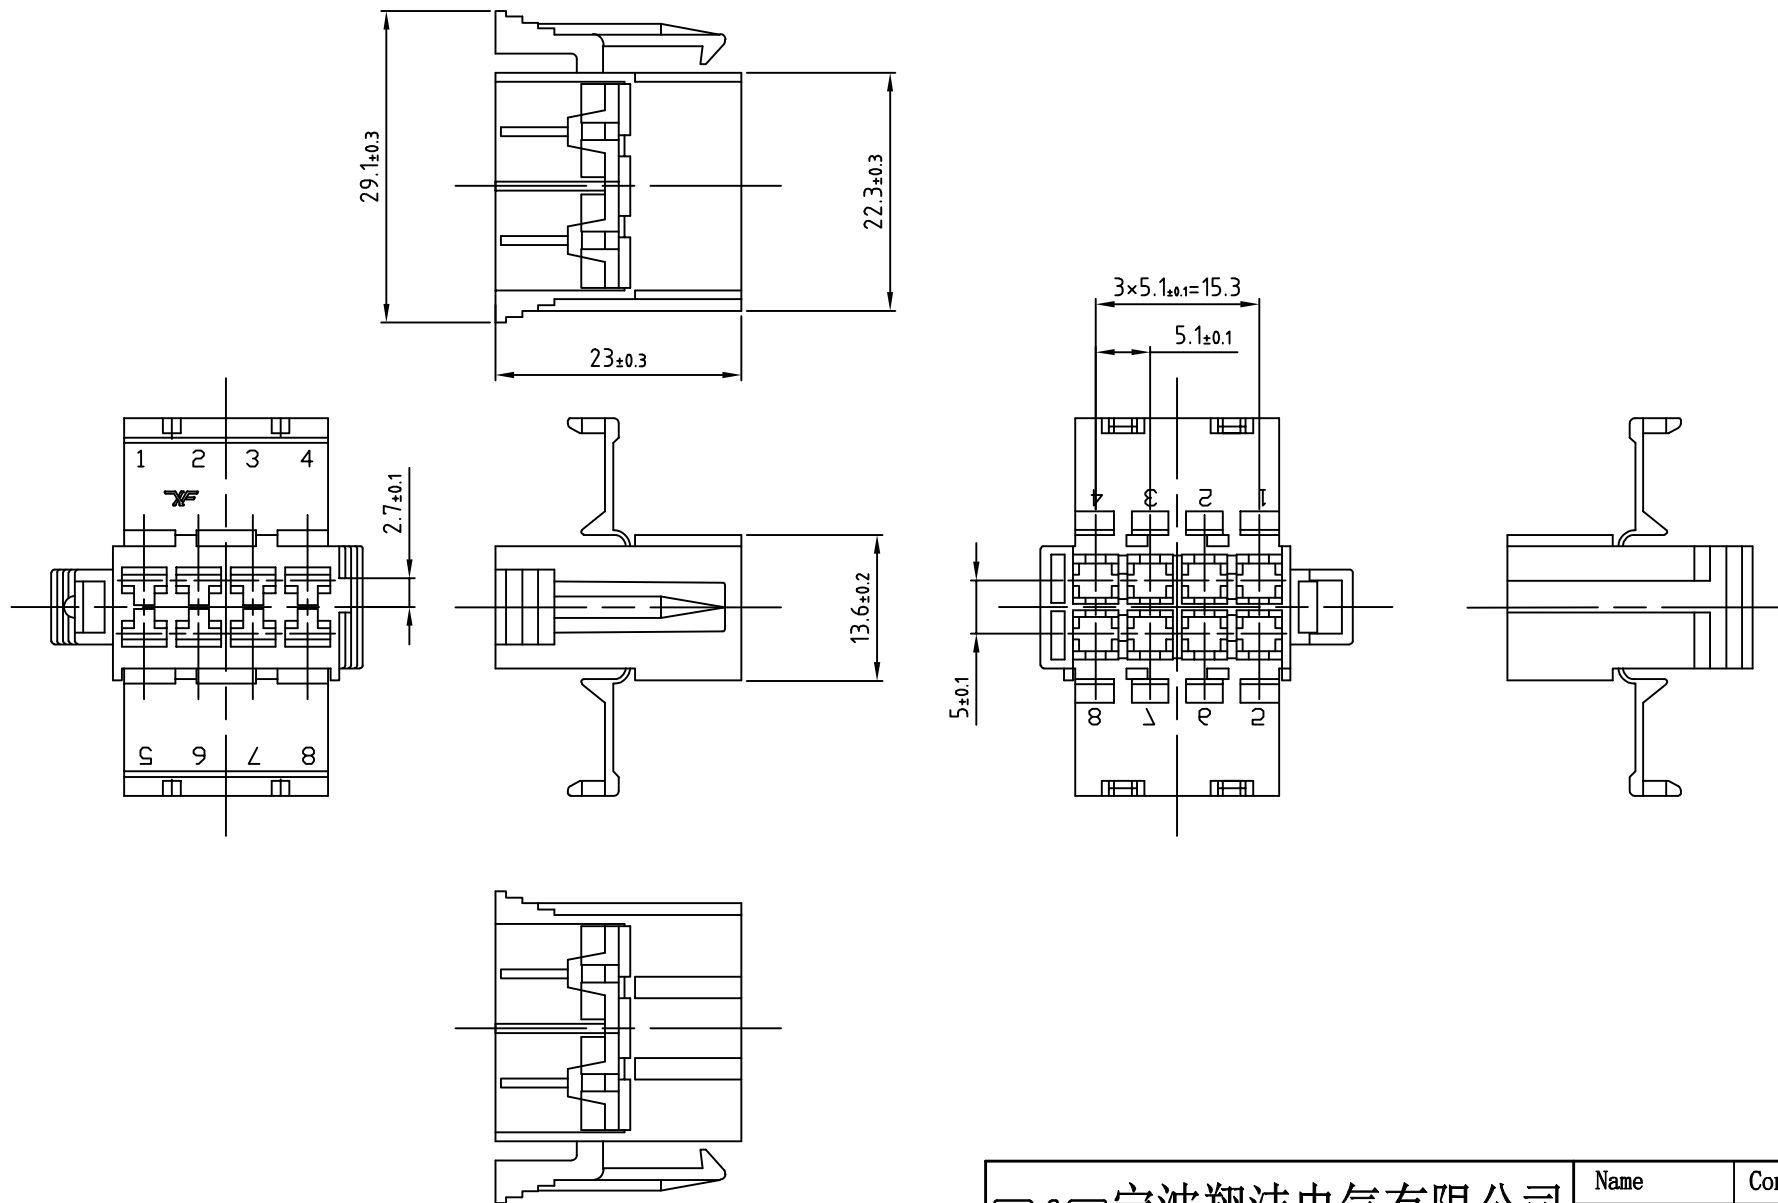

NOTES:

1. Rated current (maximum): 30A.
2. Working temperature range: -40°C TO $+120^{\circ}\text{C}$.
3. Rated voltage configuration (V): 12 | 24

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XF7082-2.8-21Rd	
					Material	PA66	
Design	Yang	2025.10	Revision	01	Color	Red	
Proofread	Yang	2025.10			Weight Kg		
Approval	Zhang	2025.10	Scale	3:1		Pages	