
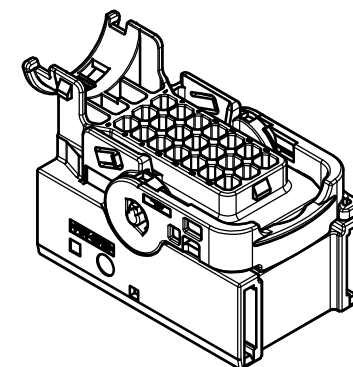
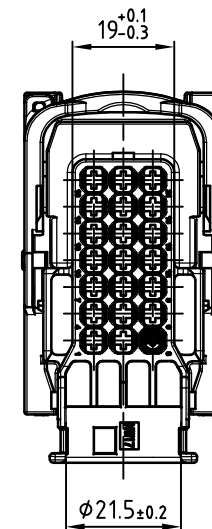
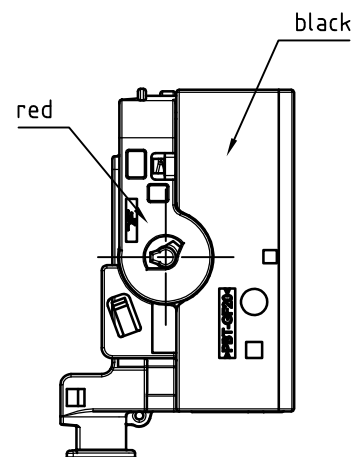


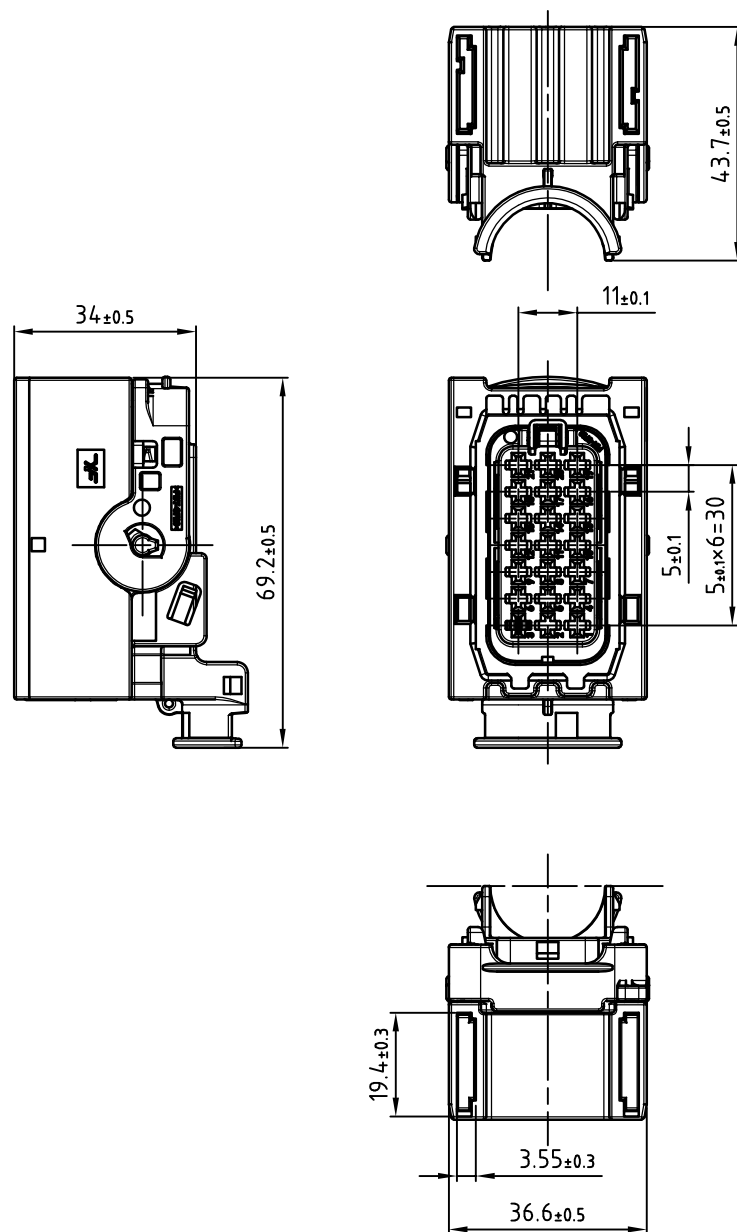

NOTES:

1. Rated current (maximum): 40A.
2. Working temperature range: -40°C TO $+120^{\circ}\text{C}$.
3. Moisture resistance: IP67, IP6K9K.
4. UL Flame resistance rating: UL-94 V0

宁波翔洋电气有限公司

NINGBO XF ELECTRONIC CO., LTD

Design	ZJH	2026.6	Revision	01	Name	Connector
Proofread	TXW	2026.6			DrawingNo	XF1-2208686-1
Approval	ZC	2026.6	Scale	1:1	Material	PBT+GF30
					Color	Black
					Weight Kg	
					Pages	