

A
B
C
D
E
F

A








B

C

D

E

F

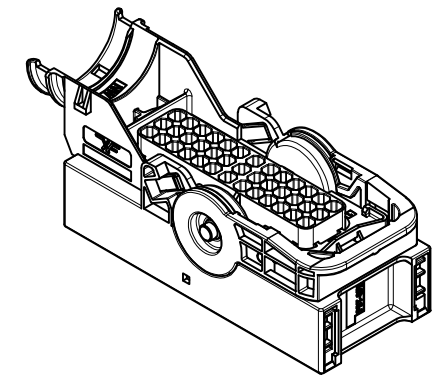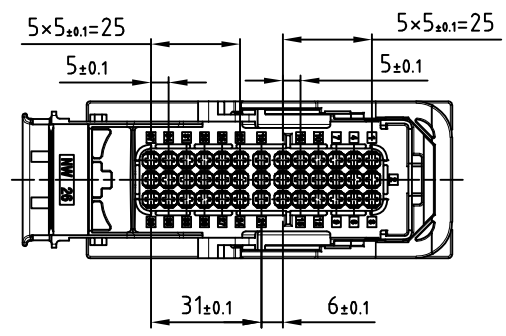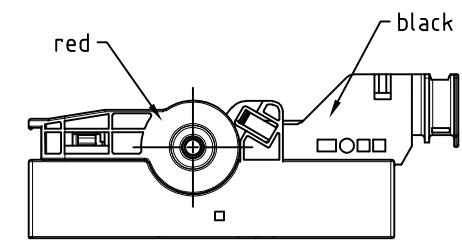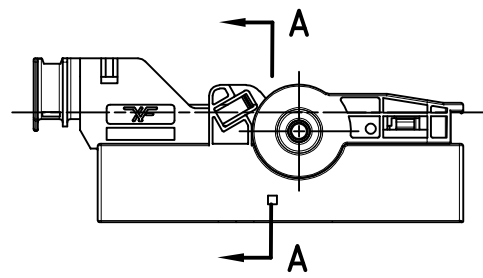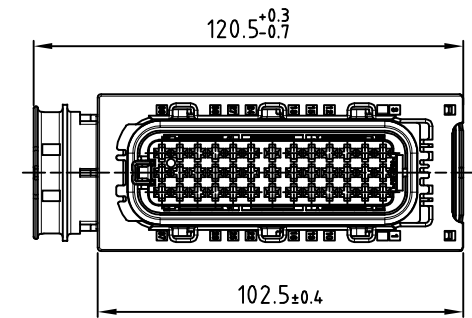

- NOTES:
- 1.Rated current (maximum): 32A.
 - 2.Working temperature range: -40℃ TO +120℃.
 - 3.Moisture resistance:IP67,IP6K9K.
 - 4.UL Flame resistance rating:UL-94 V0

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XF6-2208684-3	
					Material	PBT+GF	
Design	Zhang	2025.3	Revision	01	Color	Brown	
Proofread	Yang	2025.3			Weight Kg		
Approval	Zhang	2025.3	Scale	1:1.5		Pages	

A
B
C
D
E
F

F