


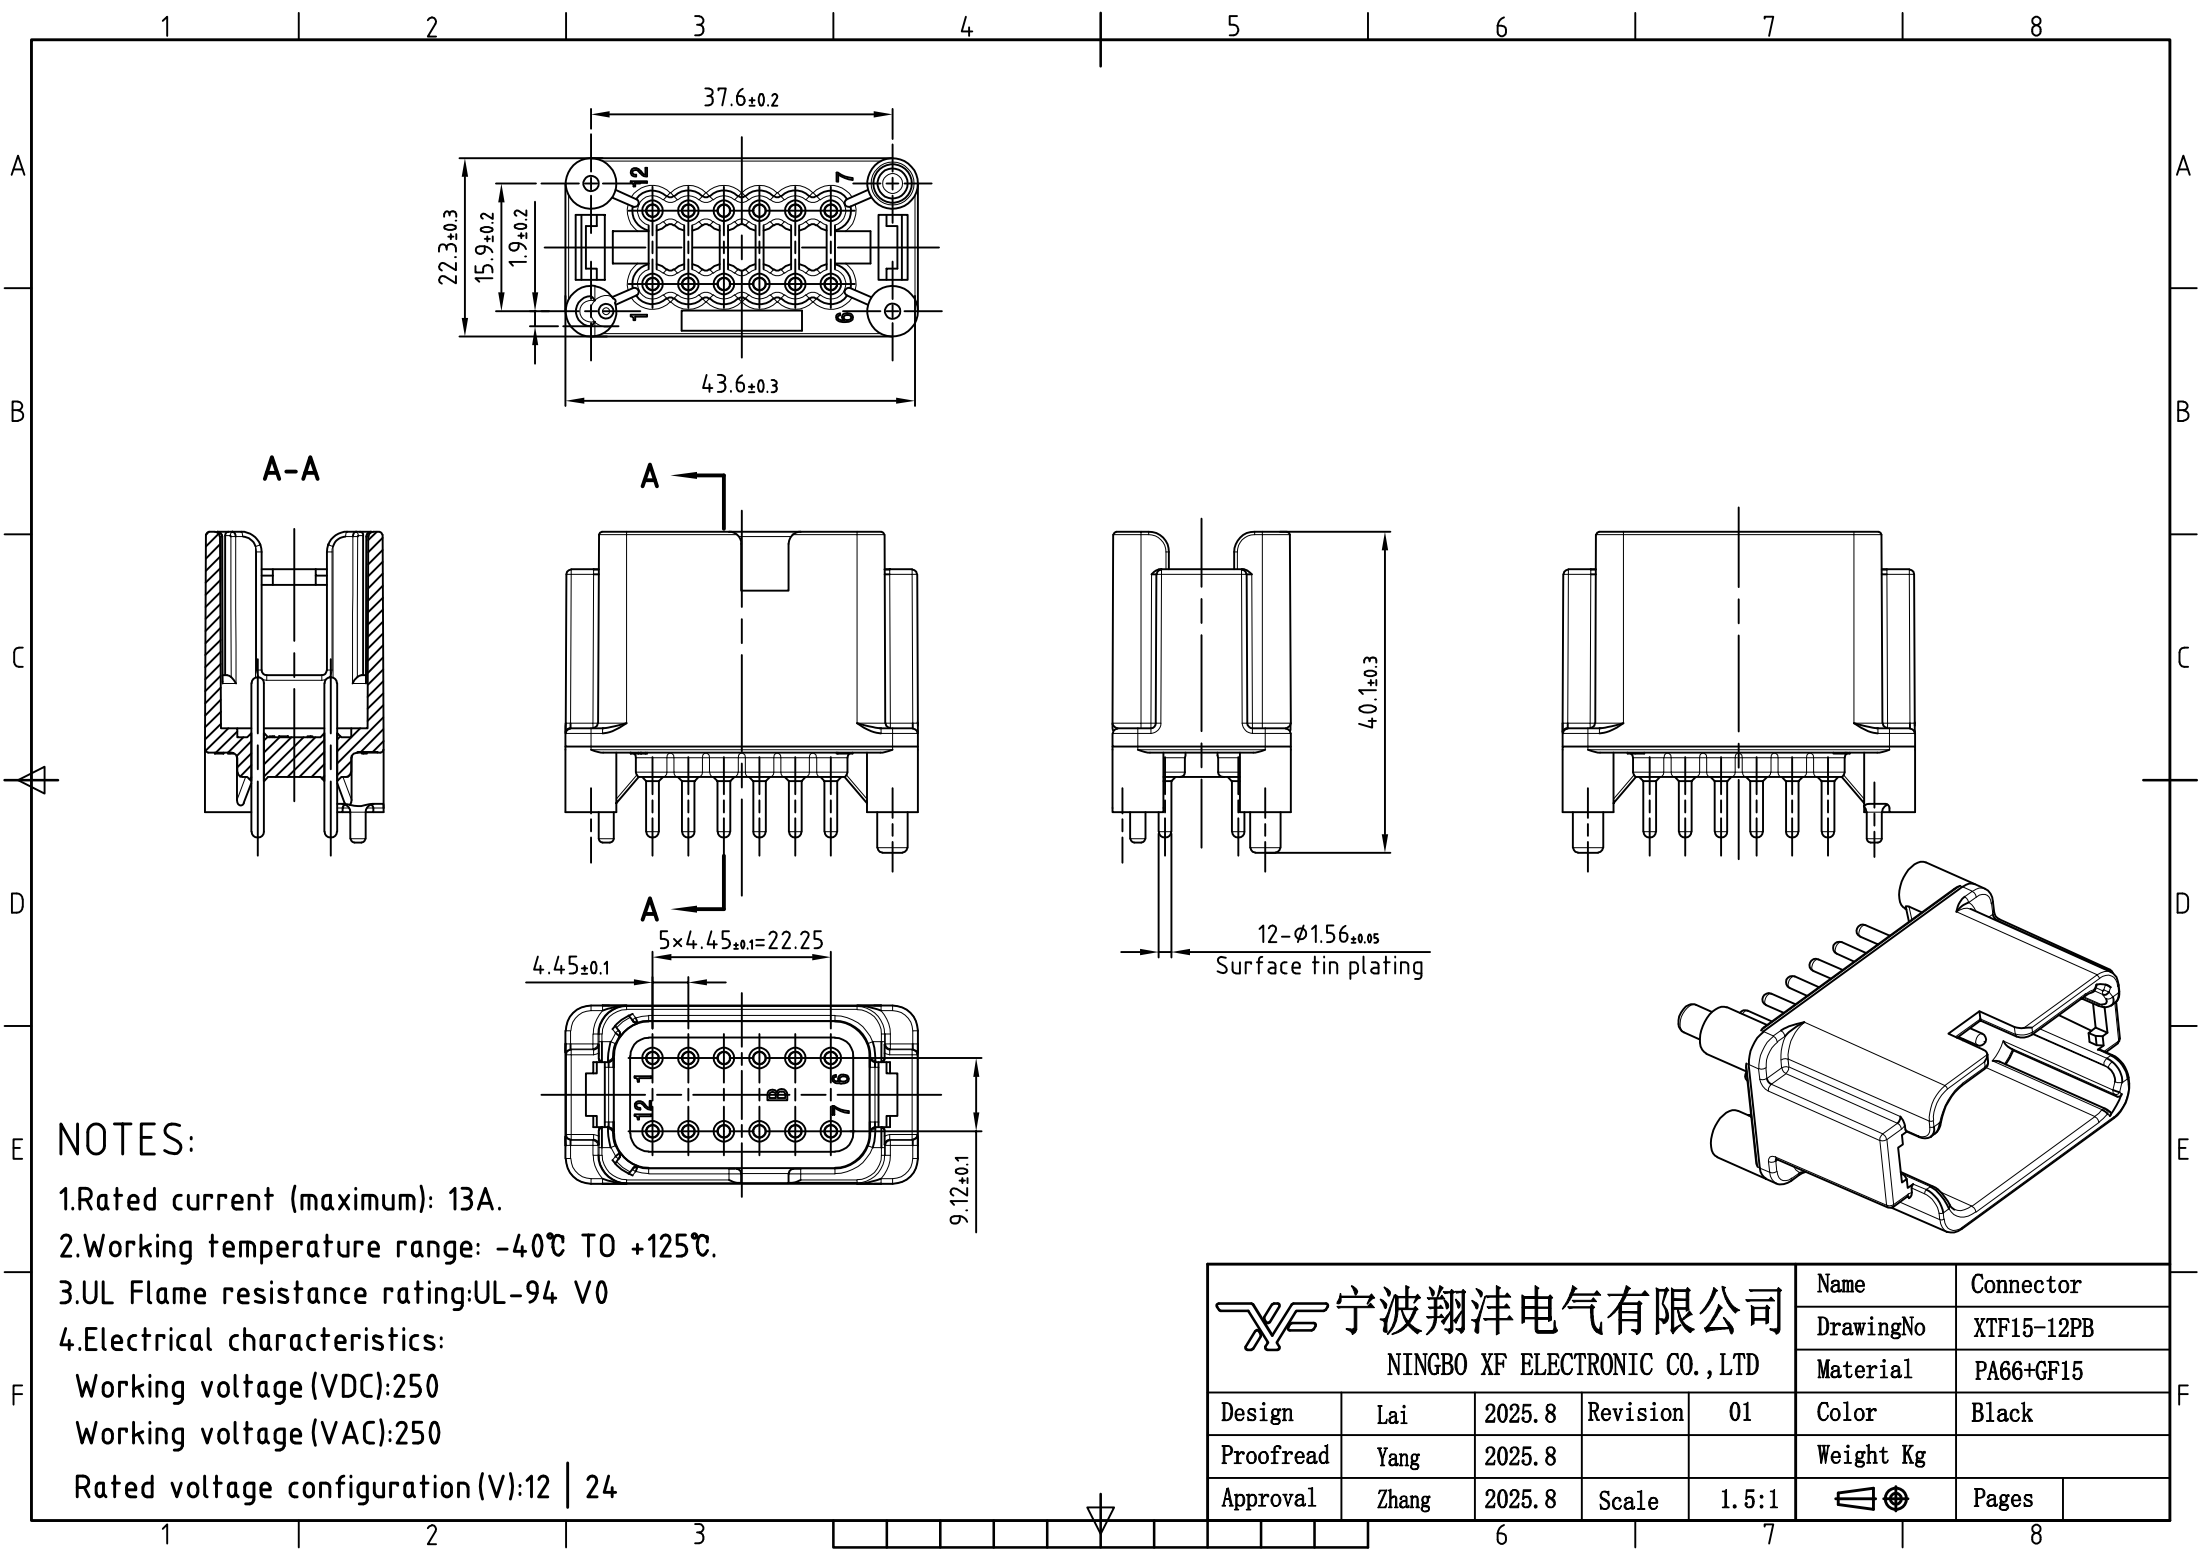

NOTES:

1.Rated current (maximum): 13A.

2.Working temperature range: -40℃ TO +125℃.

3.UL Flame resistance rating:UL-94 V0

4.Electrical characteristics:

Working voltage (VDC):250

Working voltage (VAC):250

Rated voltage configuration (V):12 | 24

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XTF15-12PB	
					Material	PA66+GF15	
Design	Lai	2025.8	Revision	01	Color	Black	
Proofread	Yang	2025.8			Weight Kg		
Approval	Zhang	2025.8	Scale	1.5:1		Pages	