


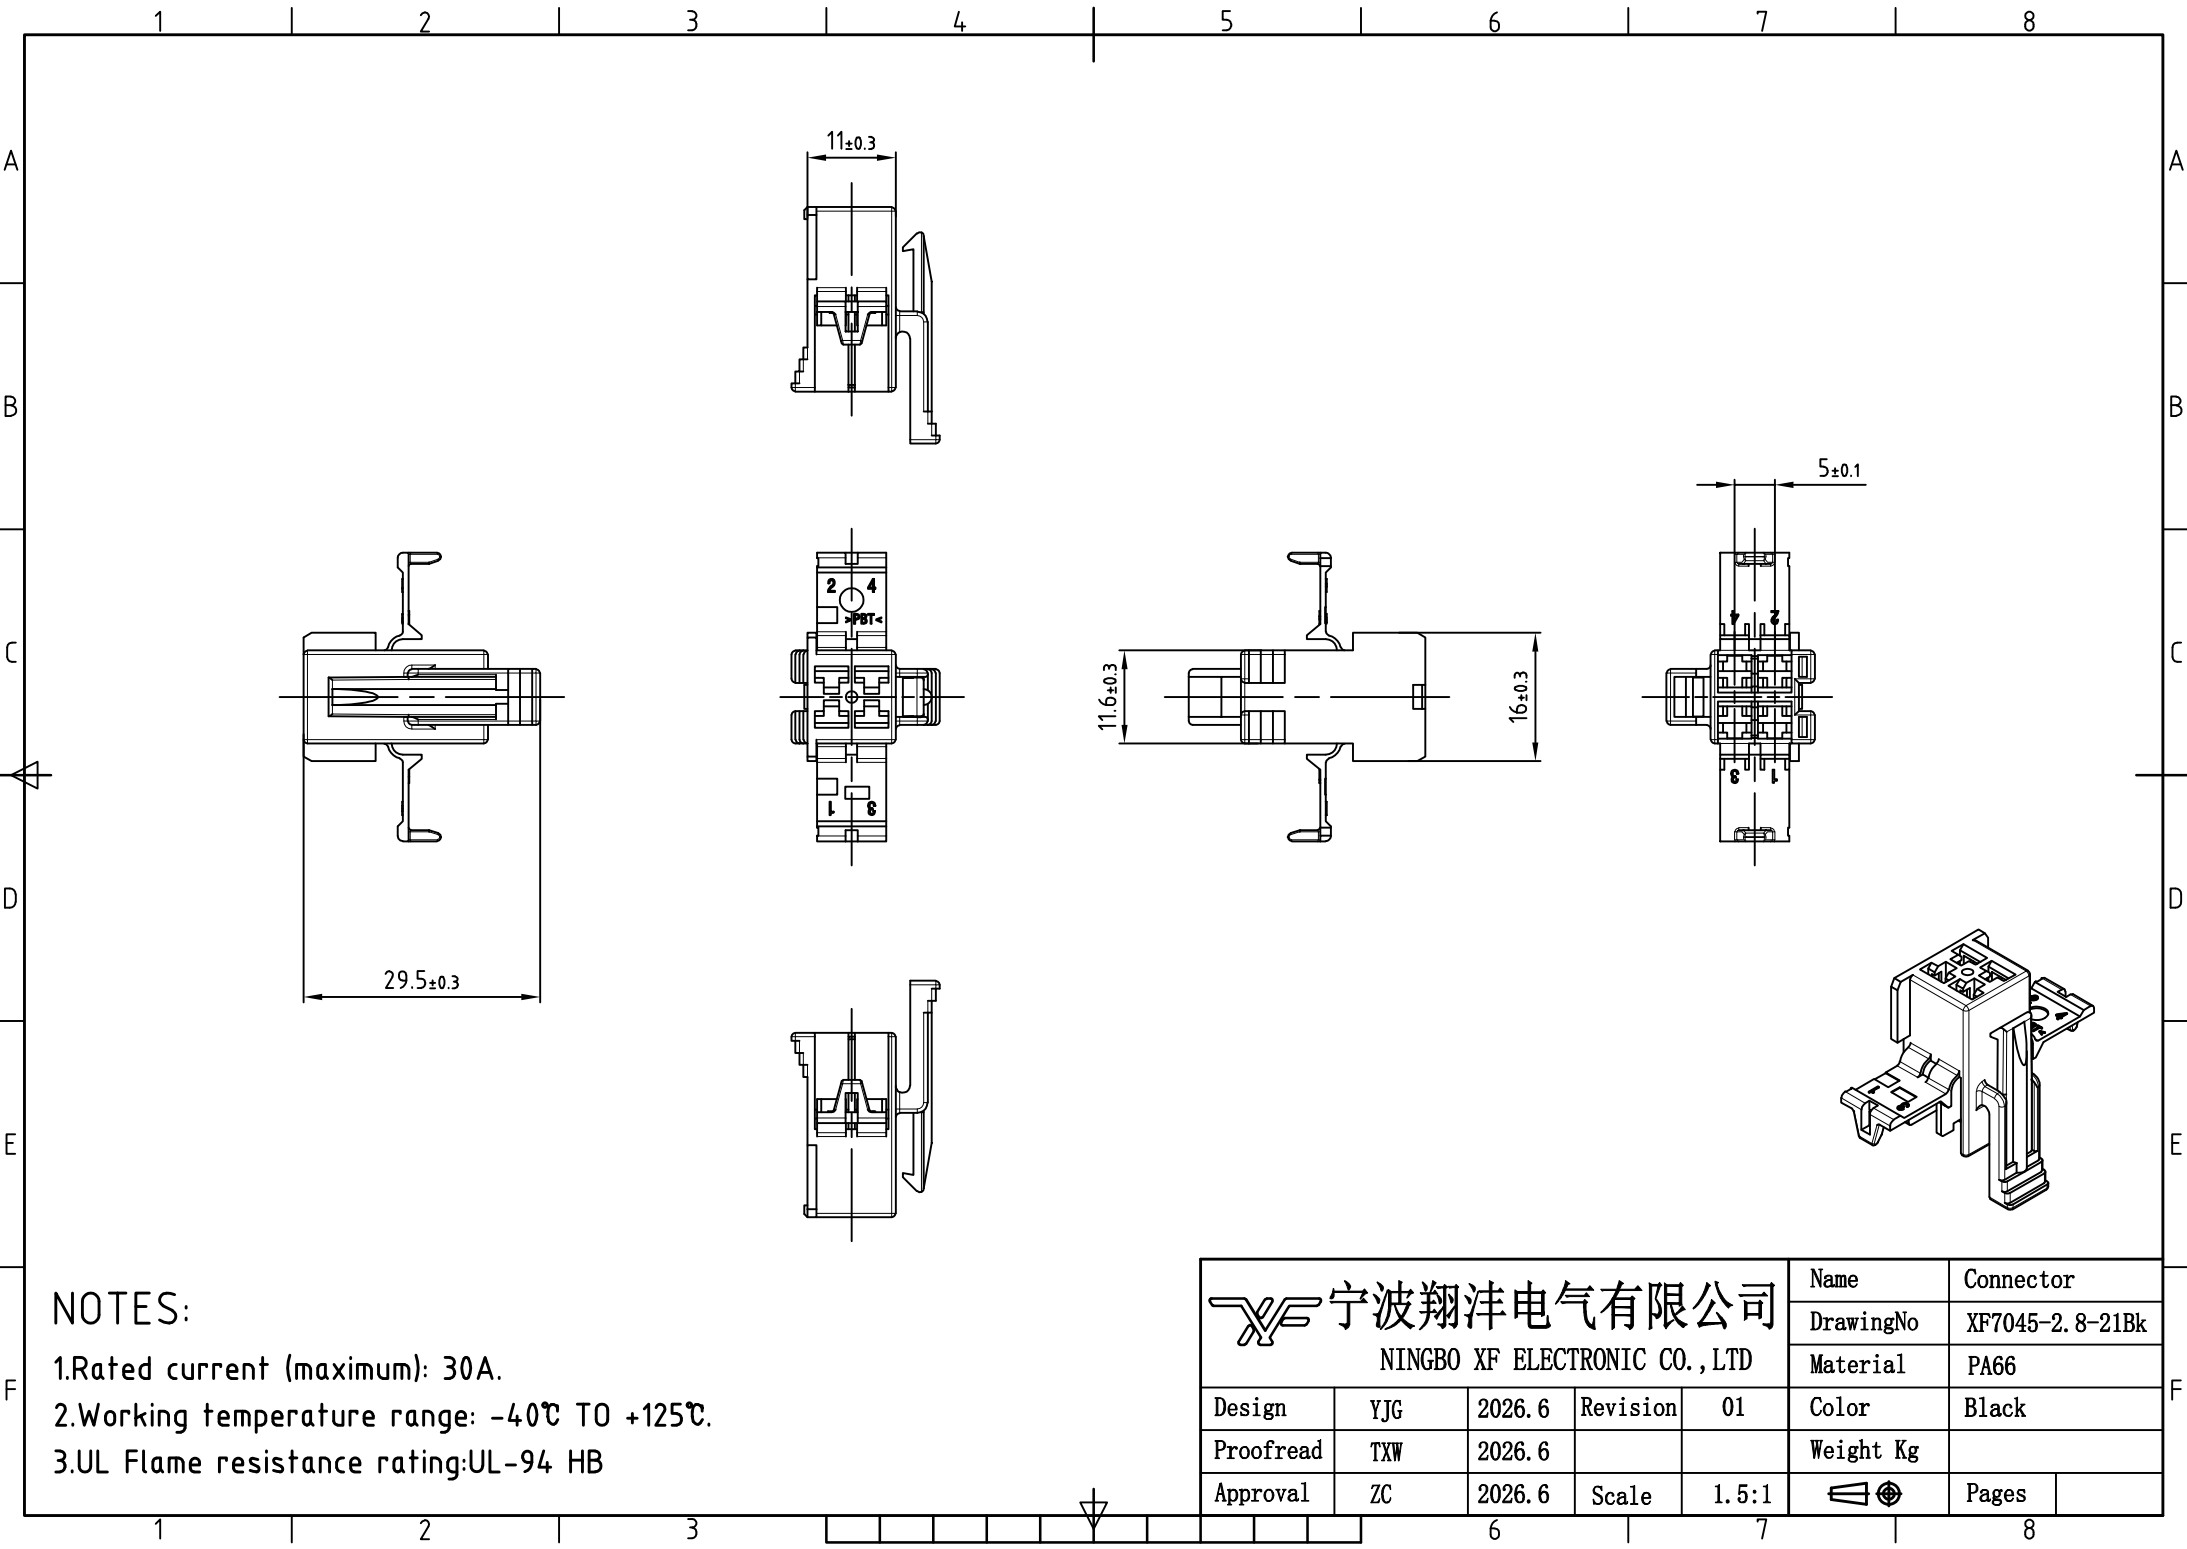

NOTES:

- 1.Rated current (maximum): 30A.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.UL Flame resistance rating:UL-94 HB

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XF7045-2.8-21Bk	
					Material	PA66	
Design	YJG	2026.6	Revision	01	Color	Black	
Proofread	TXW	2026.6			Weight Kg		
Approval	ZC	2026.6	Scale	1.5:1		Pages	