

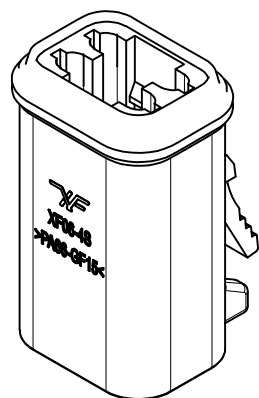
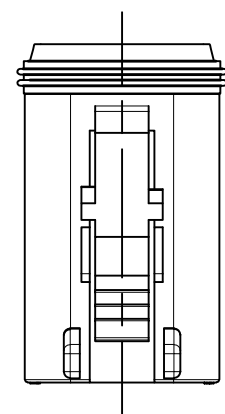
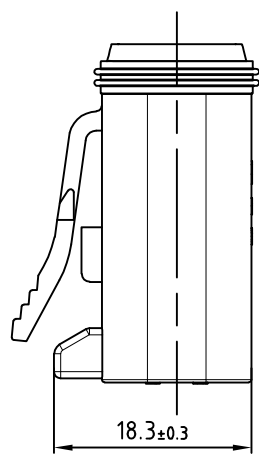
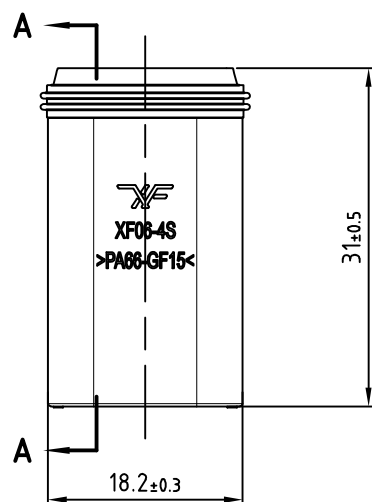
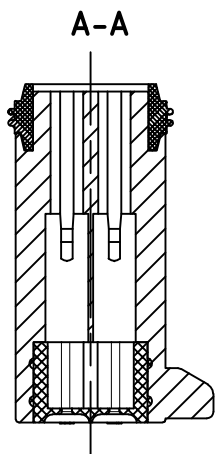


A
B
C
D
E
F

1 2 3 4 5 6 7 8

A
B
C
D
E
F

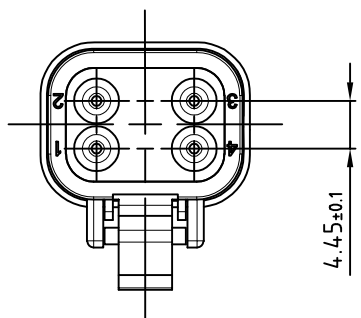

注:
1、端子额定电流(最大值)(A):13A
2、工作温度:-55℃~125℃
3、防水:IP68、IP6K9K
4、UL阻燃性等级:UL-94 V0
5、电气特征:工作电压(VDC):250
工作电压(VAC):250
标称电压架构(V):12|24|48

 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO., LTD					名 称		连接件		
					型 号		XT06-4S		
					材 料		PA66+GF15		
设 计		Lai	2025.7	标准化		颜 色		灰色	
校 对		Yang	2025.7			重 量			
审 核		Zhang	2025.7	比 例	2:1	阶段标记		版 次	01
未注公差: XX.X ±0.2;						A		页 数	

1 2 3 4 5 6 7 8