

A
B
C
D
E
F

A

B

C

D

E


F

注:







- 1、端子额定电流(最大值) (A):7.5A
- 2、工作温度:-55℃~125℃
- 3、防水:IP68、IP6K9K
- 4、UL阻燃性等级:UL-94 V0
- 5、电气特征:工作电压 (VDC):250

工作电压 (VAC):250

标称电压架构 (V):12|24|48



A-A

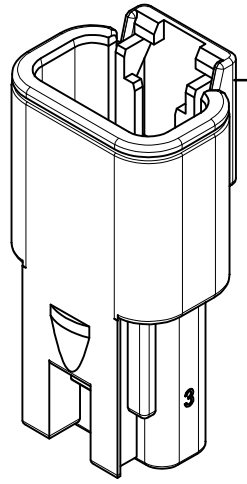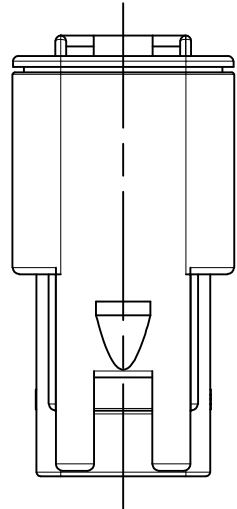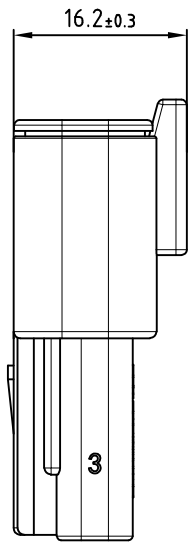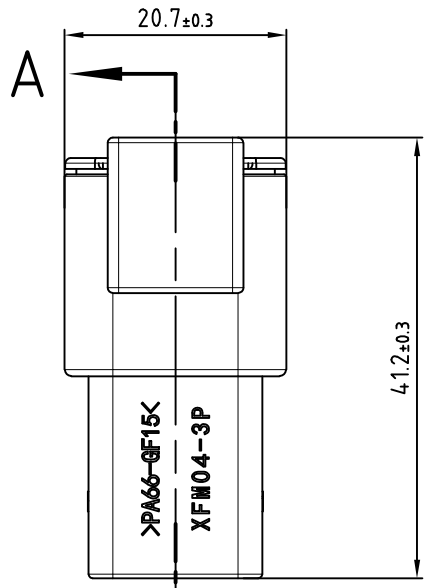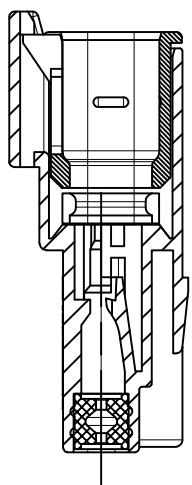

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					名称			连接件	
					型号			XTM04-3P	
					材料			PA66+GF15	
设计	Lai	2025.7	标准化		颜色			灰色	
校对	Yang	2025.7			重量				
审核	Zhang	2025.7	比例	2:1	阶段标记		版次	01	
未注公差: XX.X ±0.2;					A		页数		