

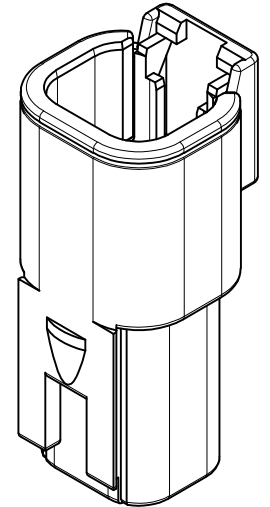
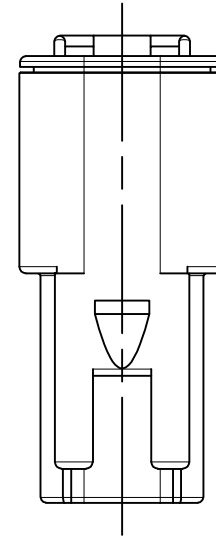
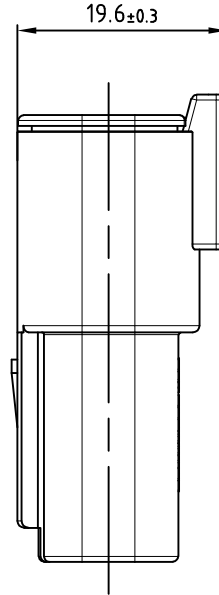
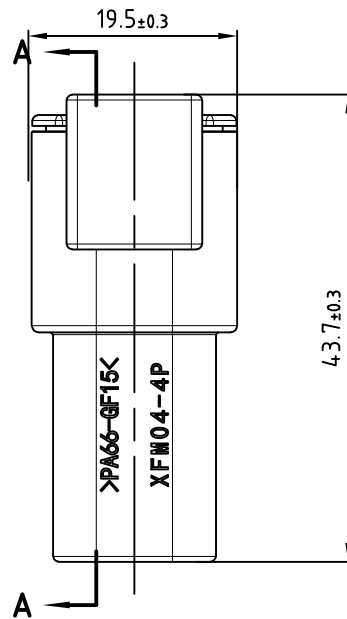



A-A

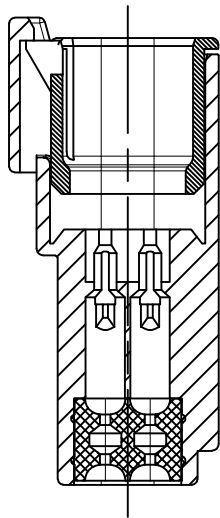

## NOTES:

- 1.CURRENT RATING: 7.5A MAXIMUM.
- 2.OPERATING TEMPERATURE: -55℃ TO +125℃.
- 3.MOISTURE RESISTANCE:IP68,IP6K9K.
- 4.UL Flame Resistance Rating:UL-94 V0
- 5.Electrical characteristics:  
Working voltage (VDC):250  
Working voltage (VAC):250  
Rated voltage configuration V):12 | 24 | 48

宁波翔沣电气有限公司

NINGBO XF ELECTRONIC CO.,LTD

|           |       |        |          |     |           |           |
|-----------|-------|--------|----------|-----|-----------|-----------|
| Design    | Lai   | 2025.7 | Revision | 01  | Name      | Connector |
| Proofread | Yang  | 2025.7 |          |     | DrawingNo | XTM04-4P  |
| Approval  | Zhang | 2025.7 | Scale    | 2:1 | Material  | PA66+GF15 |
|           |       |        |          |     | Color     | Grey      |
|           |       |        |          |     | Weight Kg |           |
|           |       |        |          |     | Pages     |           |