

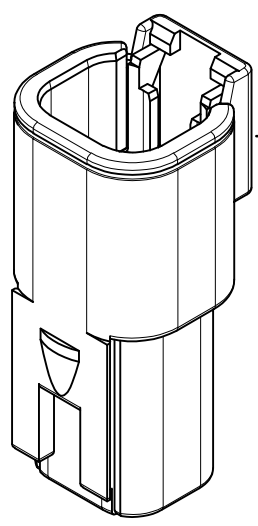
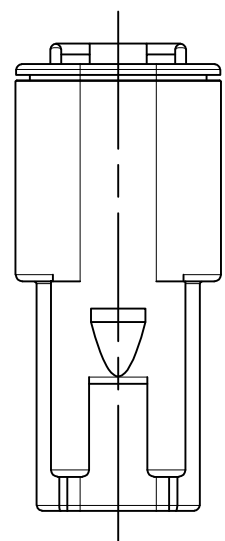
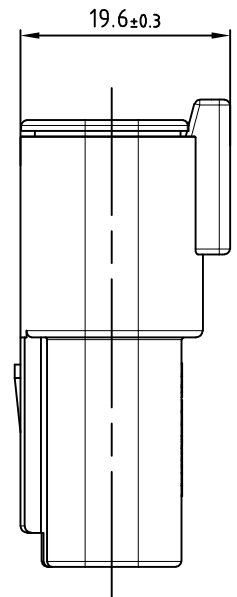
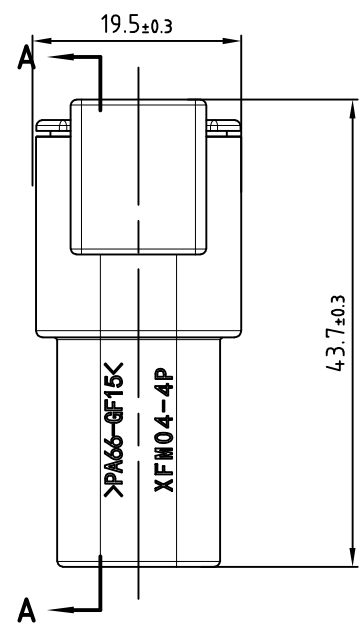
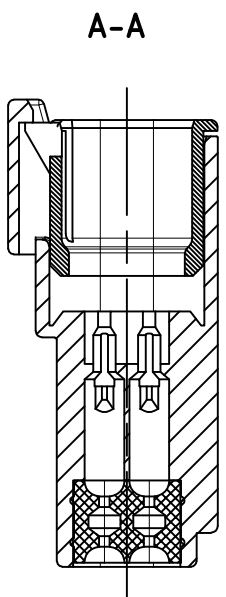


A
B
C
D
E
F

1 2 3 4 5 6 7 8

A
B
C
D
E
F



注:
1、端子额定电流(最大值)(A):7.5A
2、工作温度:-55℃~125℃
3、防水:IP68、IP6K9K
4、UL阻燃性等级:UL-94 V0
5、电气特征:工作电压(VDC):250
工作电压(VAC):250
标称电压架构(V):12|24|48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO., LTD					名称			连接件	
					型号			XTM04-4P	
					材料			PA66+GF15	
设计					Lai	2025.7	标准化	颜色	灰色
校对					Yang	2025.7		重量	
审核					Zhang	2025.7	比例	2:1	阶段标记
未注公差: XX.X ±0.2;								版次	01
								页数	

1 2 3 4 5 6 7 8