

A

B

C

D

E

F

A


B

C







D

E

F

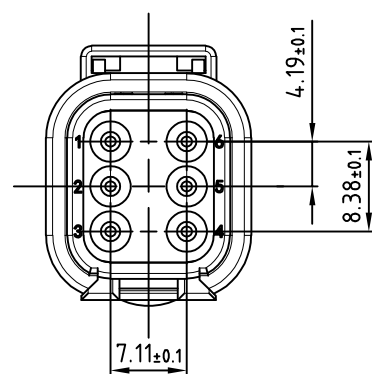

A-A

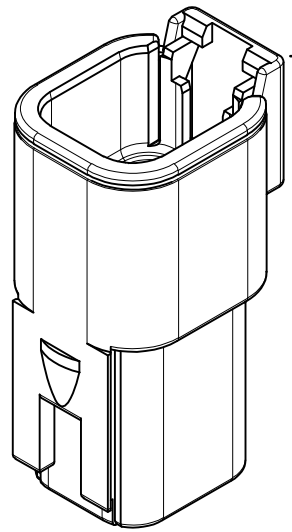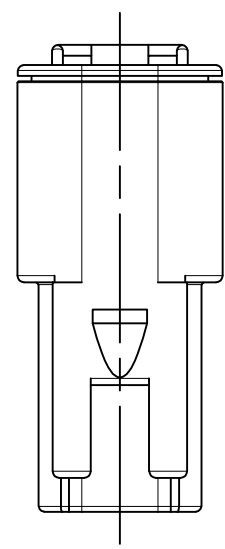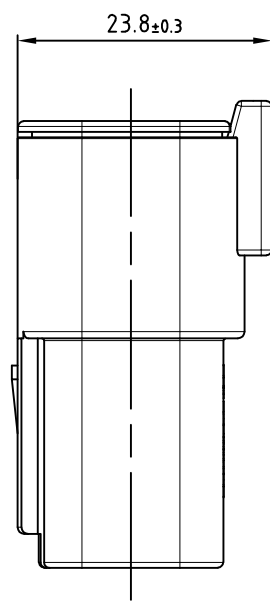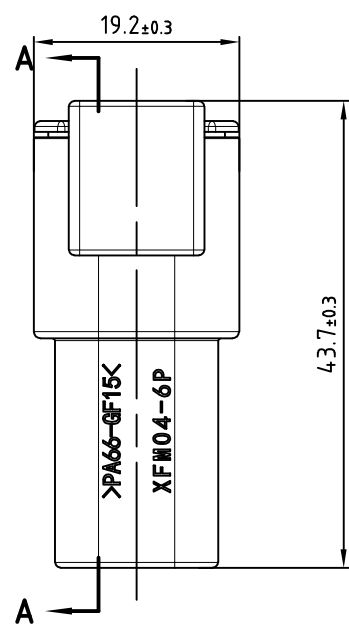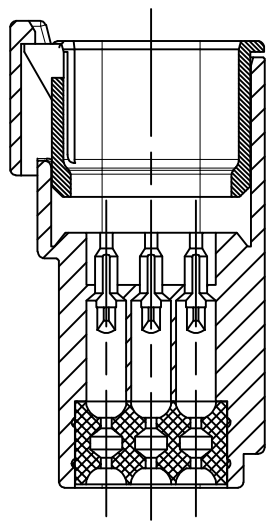

NOTES:

1.CURRENT RATING: 7.5A MAXIMUM.

2.OPERATING TEMPERATURE: -55℃ TO +125℃.

3.MOISTURE RESISTANCE:IP68,IP6K9K.

4.UL Flame Resistance Rating:UL-94 V0

5.Electrical characteristics:

Working voltage (VDC):250

Working voltage (VAC):250

Rated voltage configuration V):12 | 24 | 48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XTM04-6P	
					Material	PA66+GF15	
Design	Lai	2025.7	Revision	01	Color	Grey	
Proofread	Yang	2025.7			Weight Kg		
Approval	Zhang	2025.7	Scale	2:1		Pages	