



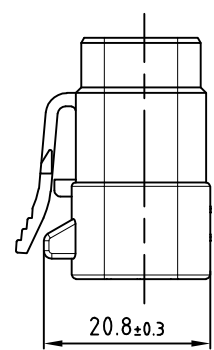
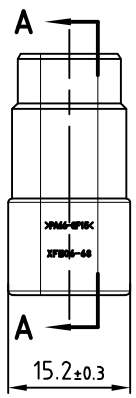



A
B
C
D
E
F

12345678



注:

- 1、端子额定电流 (最大值) (A):7.5A
 - 2、工作温度:-55℃~125℃
 - 3、防水:IP68、IP6K9K
 - 4、UL阻燃性等级:UL-94 V0
 - 5、电气特征:工作电压 (VDC):250
- 工作电压 (VAC):250
- 标称电压架构 (V):12|24|48

 宁波翔沔电气有限公司 NINGBO XF ELECTRONIC CO., LTD					名称		连接件	
					型号		XTM06-6S	
					材料		PA66+GF15	
设计	Lai	2025.7	标准化		颜色		灰色	
校对	Yang	2025.7			重量			
审核	Zhang	2025.7	比例	1.5:1	阶段标记		版次	01
未注公差: XX.X ±0.2;					A		页数	

12345678