




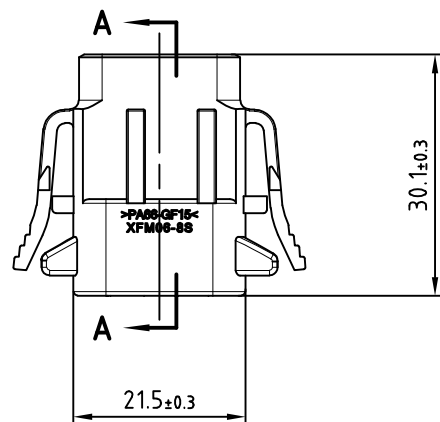



A
B
C
D
E
F

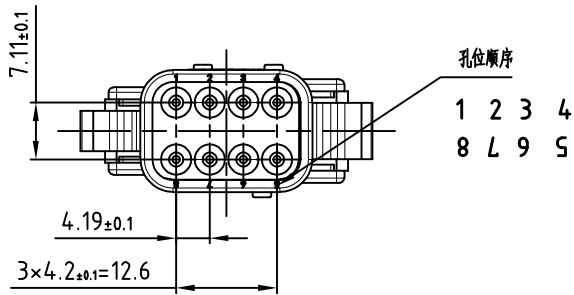

注:

- 1、端子额定电流 (最大值) (A):7.5A
- 2、工作温度:-55℃~125℃
- 3、防水:IP68、IP6K9K
- 4、UL阻燃性等级:UL-94 V0
- 5、电气特征:工作电压 (VDC):250
工作电压 (VAC):250
标称电压架构 (V):12|24|48

 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					名称			连接件	
					型号			XTM06-08SA	
					材料			PA66+GF15	
设计	Lai	2025.7	标准化		颜色			灰色	
校对	Yang	2025.7			重量				
审核	Zhang	2025.7	比例	1.5:1	阶段标记		版次	01	
未注公差: XX.X ±0.2;					A		页数		

A
B
C
D
E
F