




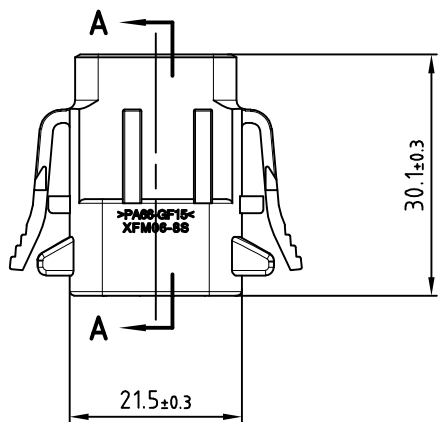
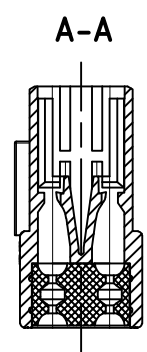


A
B
C
D
E
F

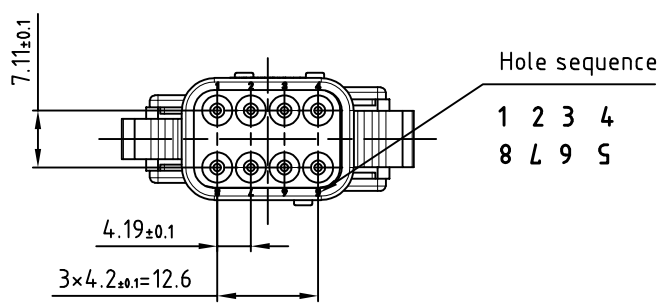

NOTES:

- 1.CURRENT RATING: 7.5A MAXIMUM.
- 2.OPERATING TEMPERATURE: -55℃ TO +125℃.
- 3.MOISTURE RESISTANCE:IP68,IP6K9K.
- 4.UL Flame Resistance Rating:UL-94 V0
- 5.Electrical characteristics:
Working voltage (VDC):250
Working voltage (VAC):250
Rated voltage configuration V):12 | 24 | 48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name		Connector	
					DrawingNo		XTM06-08SA	
					Material		PA66+GF15	
Design	Lai	2025.7	Revision	01	Color		Grey	
Proofread	Yang	2025.7			Weight Kg			
Approval	Zhang	2025.7	Scale	1.5:1			Pages	

A
B
C
D
E
F