




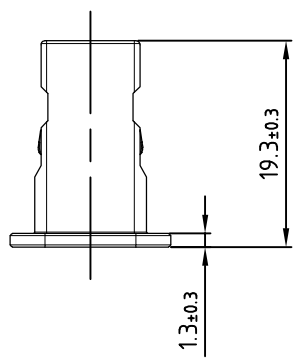


A
B
C
D
E
F

1 2 3 4 5 6 7 8



注:
1、工作温度:-55℃~125℃
2、UL阻燃性等级:UL-94 V0

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					名 称	锁片			
					型 号	XFW2S			
					材 料	PA66+GF15			
设 计	Lai	2025.11	标准化		颜 色	橙色			
校 对	Yang	2025.11			重 量				
审 核	Zhang	2025.11	比 例	2:1	阶段标记		版 次	01	
未注公差: XX.X ±0.2;					A		页 数		

1 2 3 4 5 6 7 8