



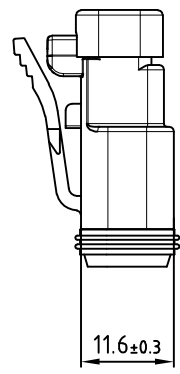
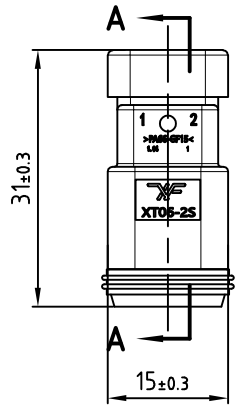



A
B
C
D
E
F

1 2 3 4 5 6 7 8

A-A



注:

- 1、端子额定电流(最大值)(A):13A
- 2、工作温度:-55℃~125℃
- 3、防水:IP68、IP6K9K
- 4、UL阻燃性等级:UL-94 V0
- 5、电气特征:工作电压(VDC):250
- 工作电压(VAC):250
- 标称电压架构(V):12|24|48

 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					名 称	连接件			
					型 号	XT06-2S-E005			
					材 料	PA66+GF15			
设 计	Lai	2026.1	标准化		颜 色	黑色			
校 对	Yang	2026.1			重 量				
审 核	Zhang	2026.1	比 例	1.5:1	阶段标记		版 次	01	
未注公差: XX.X ±0.2;					A			页 数	

1 2 3 4 5 6 7 8