



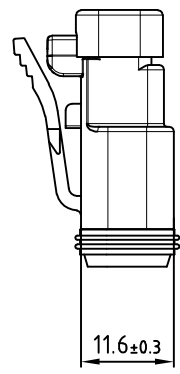
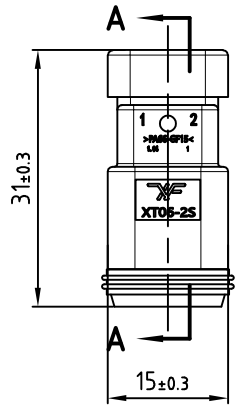



A
B
C
D
E
F

1 2 3 4 5 6 7 8

A-A



注:

- 1、端子额定电流 (最大值) (A):13A
- 2、工作温度:-55℃~125℃
- 3、防水:IP68、IP6K9K
- 4、UL阻燃性等级:UL-94 V0
- 5、电气特征:工作电压 (VDC):250
- 工作电压 (VAC):250
- 标称电压架构 (V):12|24|48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					名称		连接件	
					型号		XT06-2S-EP06	
					材料		PA66+GF15	
设计	Lai	2026.1	标准化		颜色		黑色	
校对	Yang	2026.1			重量			
审核	Zhang	2026.1	比例	1.5:1	阶段标记		版次	01
未注公差: XX.X ±0.2;					A		页数	

1 2 3 4 5 6 7 8