


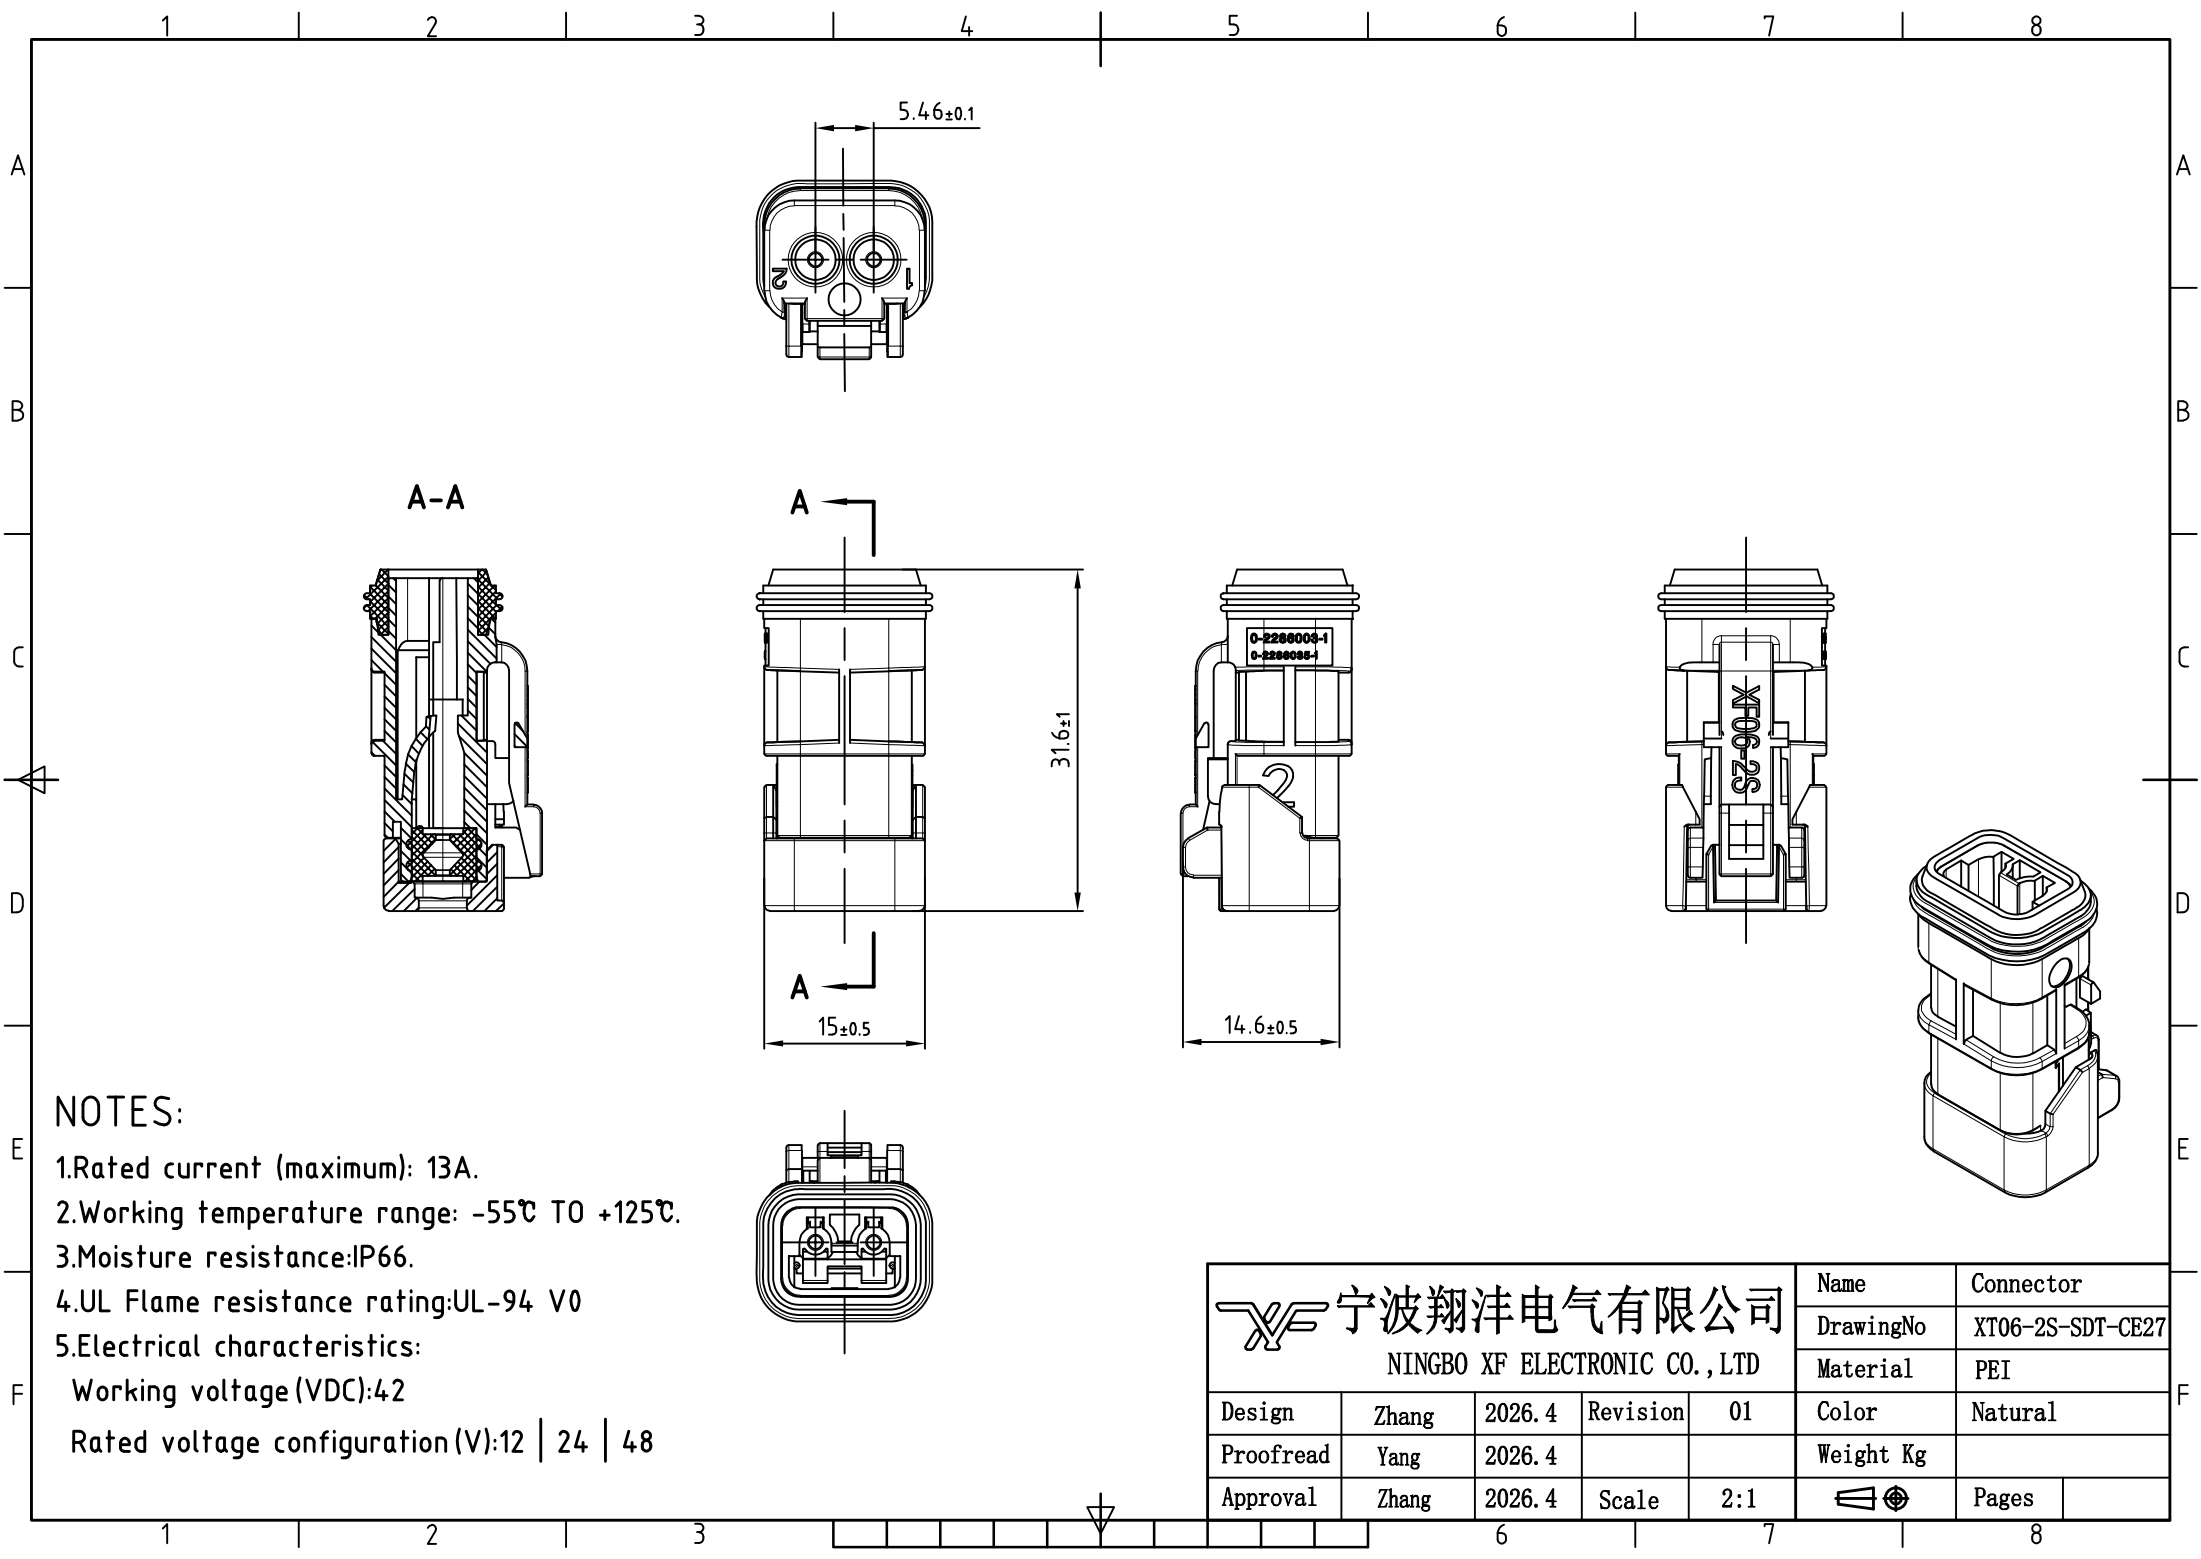

NOTES:

- 1.Rated current (maximum): 13A.
- 2.Working temperature range: -55℃ TO +125℃.
- 3.Moisture resistance:IP66.
- 4.UL Flame resistance rating:UL-94 V0
- 5.Electrical characteristics:
Working voltage(VDC):42
Rated voltage configuration (V):12 | 24 | 48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XT06-2S-SDT-CE27	
					Material	PEI	
Design	Zhang	2026.4	Revision	01	Color	Natural	
Proofread	Yang	2026.4			Weight Kg		
Approval	Zhang	2026.4	Scale	2:1		Pages	