


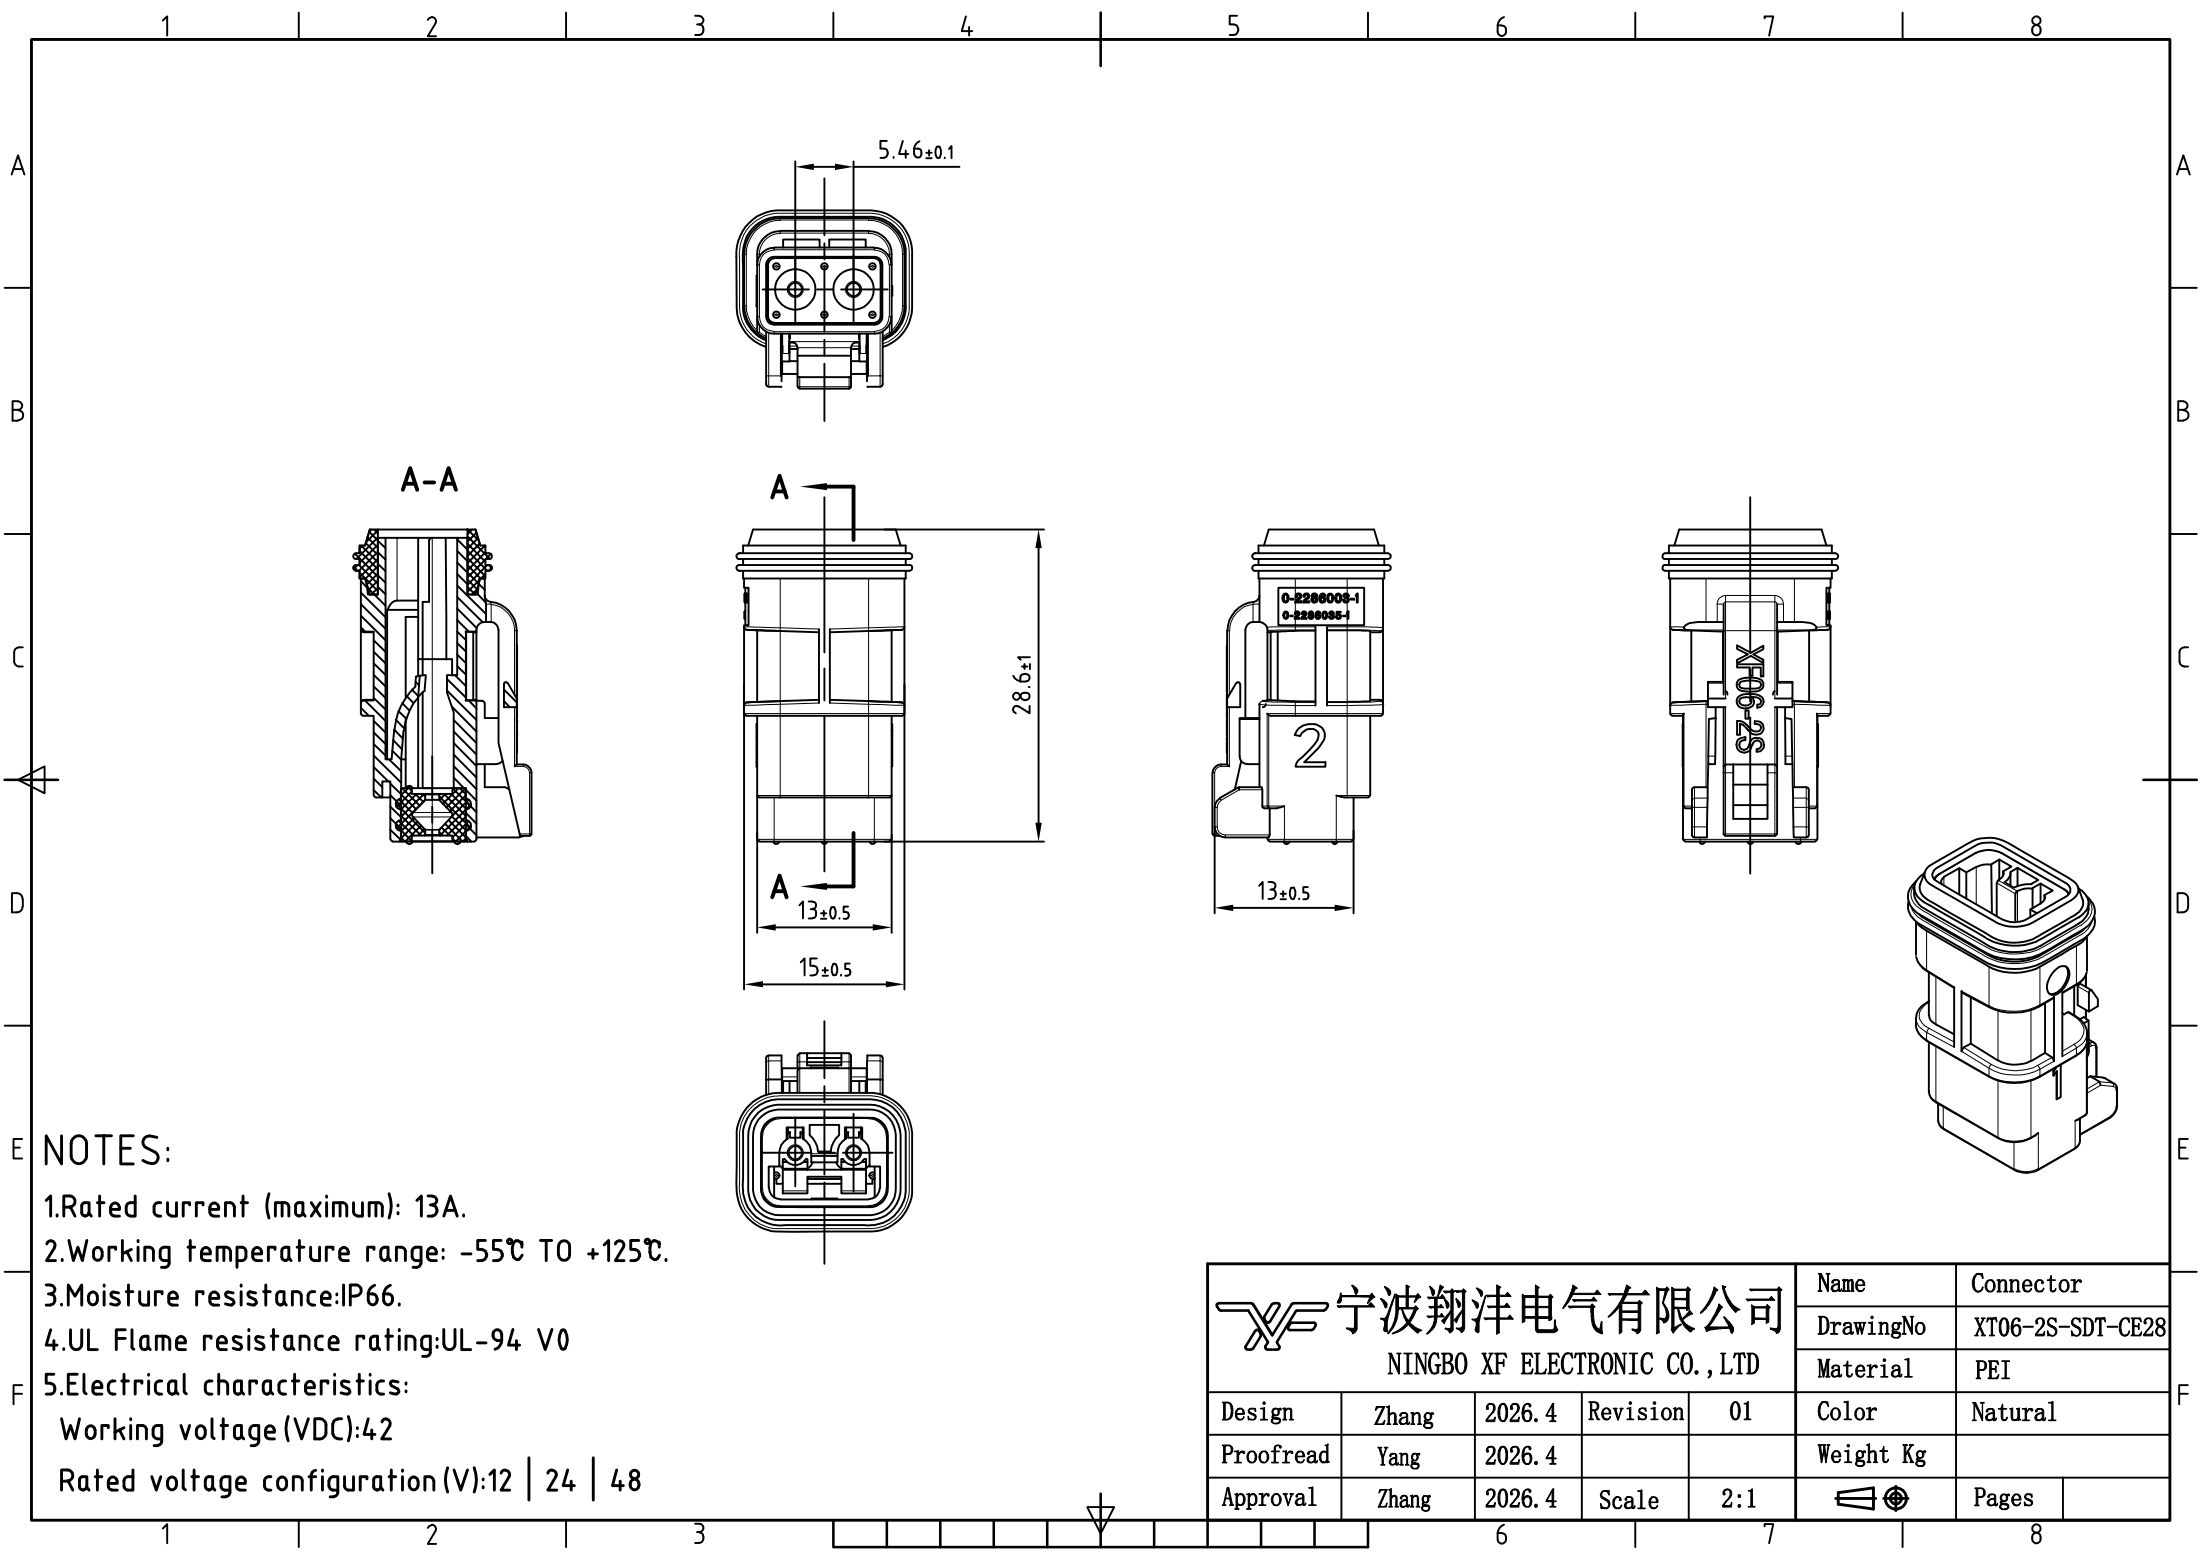

NOTES:

1.Rated current (maximum): 13A.

2.Working temperature range: -55℃ TO +125℃.

3.Moisture resistance:IP66.

4.UL Flame resistance rating:UL-94 V0

5.Electrical characteristics:

Working voltage (VDC):42

Rated voltage configuration (V):12 | 24 | 48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XT06-2S-SDT-CE28	
					Material	PEI	
Design	Zhang	2026. 4	Revision	01	Color	Natural	
Proofread	Yang	2026. 4			Weight Kg		
Approval	Zhang	2026. 4	Scale	2:1		Pages	