

1 2 3 4 5 6 7 8

A

B

C

D

E

F

A







B

C

D


E

F

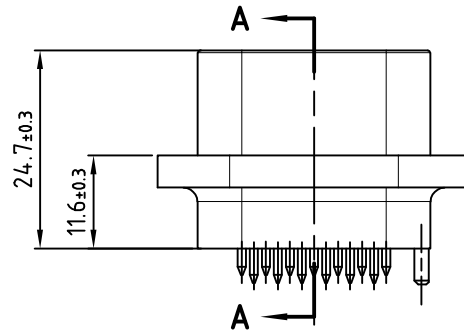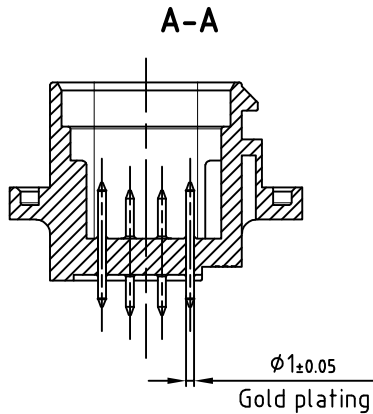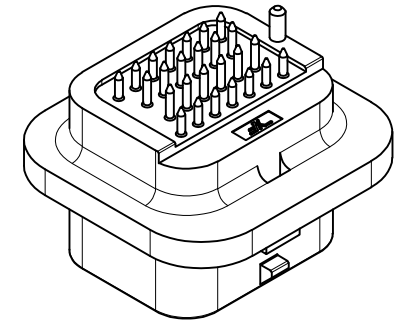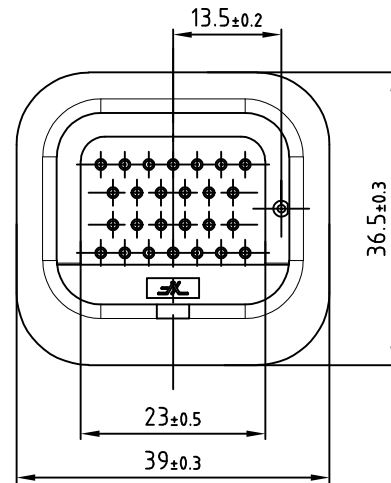

NOTES:

- 1.Working temperature range: -40°C TO $+120^{\circ}\text{C}$.
- 2.Moisture resistance:IPX7.
- 3.UL Flame resistance rating:UL-94 HB
- 4.Electrical characteristics:
Working voltage (VDC):250
Working voltage (VAC):250
Rated voltage configuration (V):250

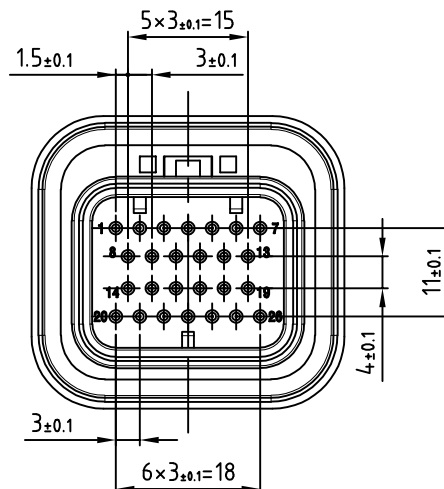

 宁波翔沣电气有限公司

NINGBO XF ELECTRONIC CO.,LTD

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XF6437288-6	
					Material	PBT+GF30	
Design	ZJH	2026.7	Revision	01	Color	Black	
Proofread	TXW	2026.7			Weight Kg		
Approval	ZC	2026.7	Scale	1.5:1		Pages	

1 2 3 4 5 6 7 8