



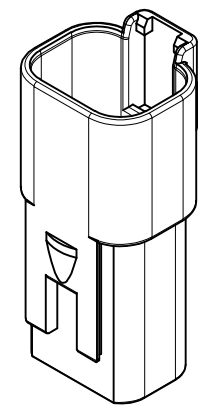
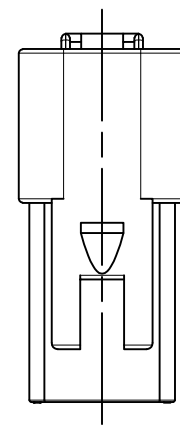
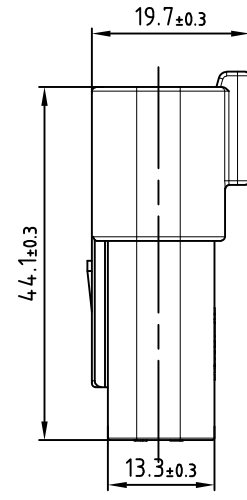


A
B
C
D
E
F

1 2 3 4 5 6 7 8

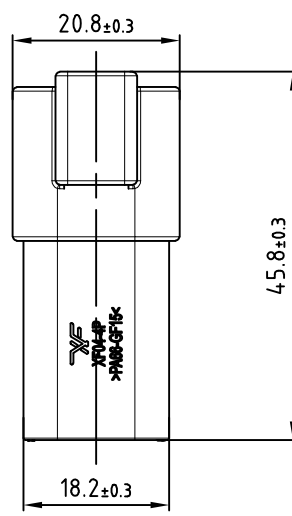

A-A

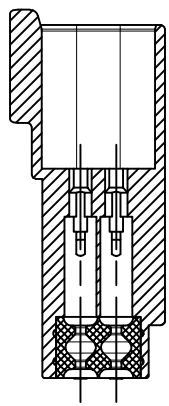

注:

- 1、端子额定电流(最大值)(A):13A
 - 2、工作温度:-55℃~125℃
 - 3、防水:IP68、IP6K9K
 - 4、UL阻燃性等级:UL-94 V0
 - 5、电气特征:工作电压(VDC):250
- 工作电压(VAC):250
- 标称电压架构(V):12|24|48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO., LTD					名称		连接件	
					型号		XT04-4P-E004	
					材料		PA66+GF	
设计	Lai	2025.5	标准化		颜色		黑色	
校对	Yang	2025.5			重量			
审核	Zhang	2025.5	比例	1.5:1	阶段标记		版次	01
未注公差: XX.X ±0.2;					A		页数	

1 2 3 4 5 6 7 8