
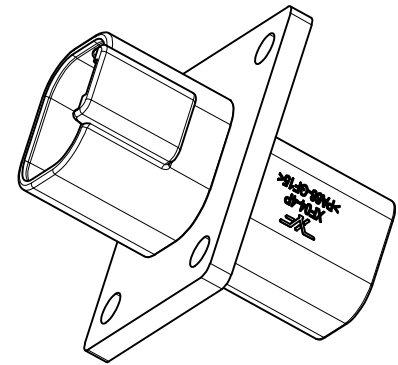
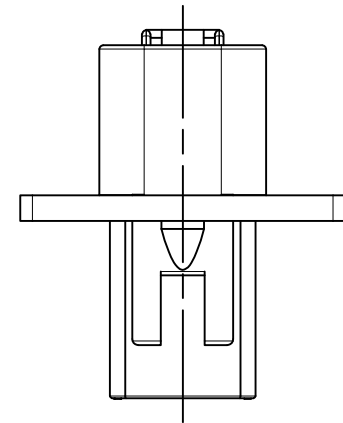
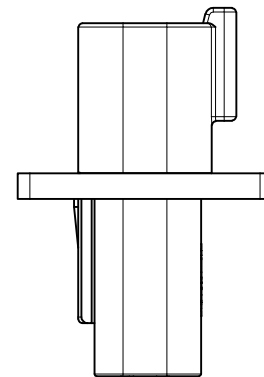
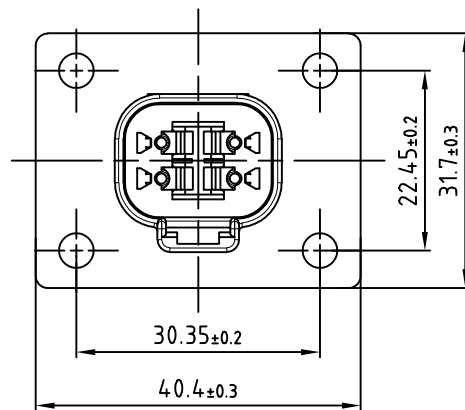
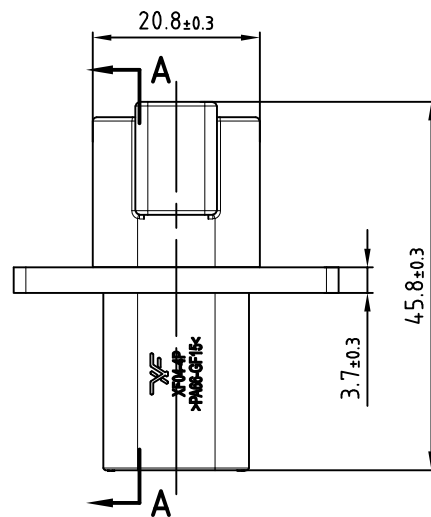
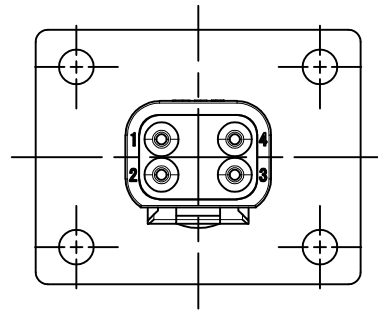


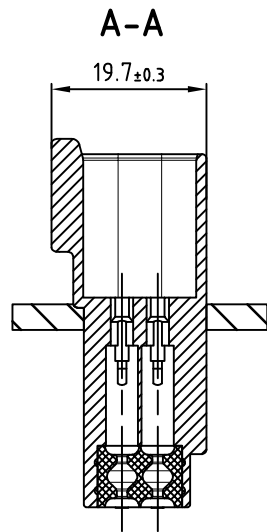

## NOTES:

- 1.CURRENT RATING: 13A MAXIMUM.
- 2.OPERATING TEMPERATURE: -55℃ TO +125℃.
- 3.MOISTURE RESISTANCE:IP68,IP6K9K.
- 4.UL Flame Resistance Rating:UL-94 V0
- 5.Electrical characteristics:  
Working voltage (VDC):250  
Working voltage (VAC):250  
Rated voltage configuration V):12 | 24 | 48

宁波翔沣电气有限公司  
NINGBO XF ELECTRONIC CO.,LTD

|           |       |        |          |       |           |              |
|-----------|-------|--------|----------|-------|-----------|--------------|
|           |       |        |          |       | Name      | Connector    |
|           |       |        |          |       | DrawingNo | XT04-4P-LE14 |
|           |       |        |          |       | Material  | PA66+GF15    |
| Design    | Lai   | 2025.5 | Revision | 01    | Color     | Black        |
| Proofread | Yang  | 2025.5 |          |       | Weight Kg |              |
| Approval  | Zhang | 2025.5 | Scale    | 1.5:1 | Pages     |              |