
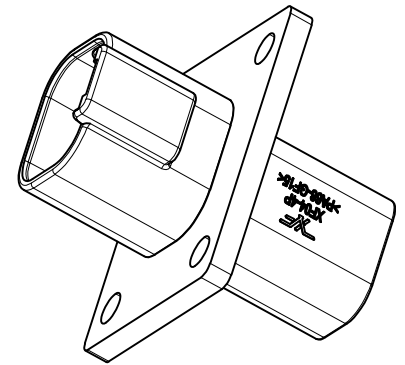
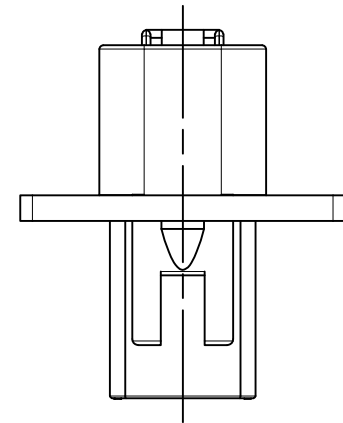
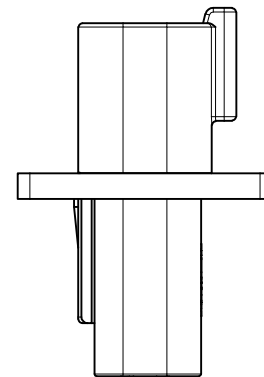
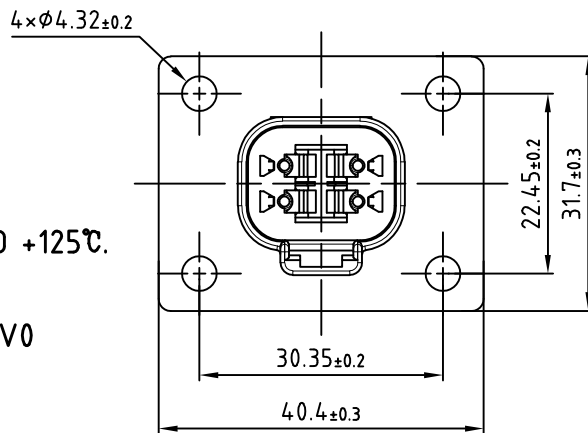
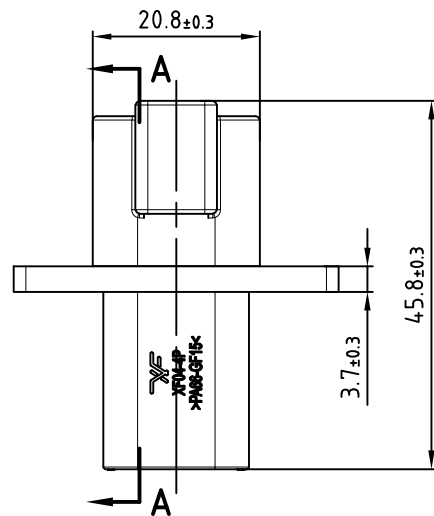
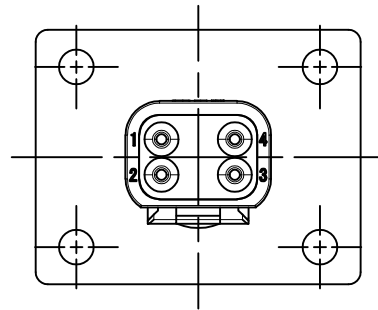


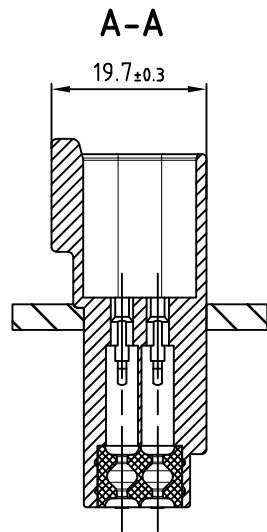

NOTES:

- 1.CURRENT RATING: 13A MAXIMUM.
- 2.OPERATING TEMPERATURE: -55℃ TO +125℃.
- 3.MOISTURE RESISTANCE:IP68,IP6K9K.
- 4.UL Flame Resistance Rating:UL-94 V0
- 5.Electrical characteristics:
Working voltage (VDC):250
Working voltage (VAC):250
Rated voltage configuration V):12 | 24 | 48

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO.,LTD

					Name	Connector
					DrawingNo	XT04-4P-CL06
					Material	PA66+GF15
Design	Lai	2025.5	Revision	01	Color	Black
Proofread	Yang	2025.5			Weight Kg	
Approval	Zhang	2025.5	Scale	1.5:1		Pages