

A
B
C
D
E
F

A

B

C

D

E








F

注:

- 1、端子额定电流 (最大值) (A):13A
- 2、工作温度:-55℃~125℃
- 3、防水:IP68、IP6K9K
- 4、UL阻燃性等级:UL-94 V0
- 5、电气特征:工作电压 (VDC):250

工作电压 (VAC):250

标称电压架构 (V):12|24|48

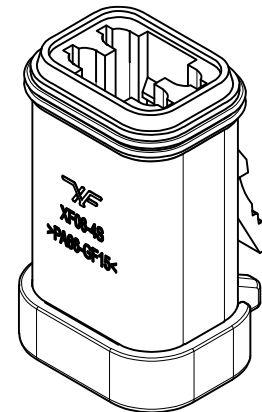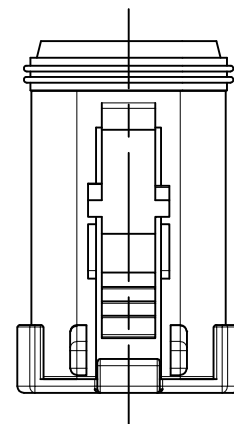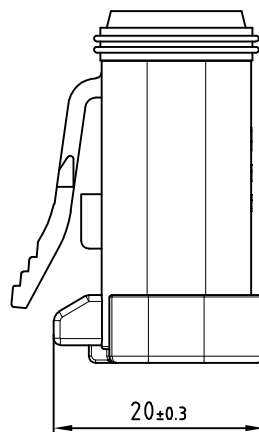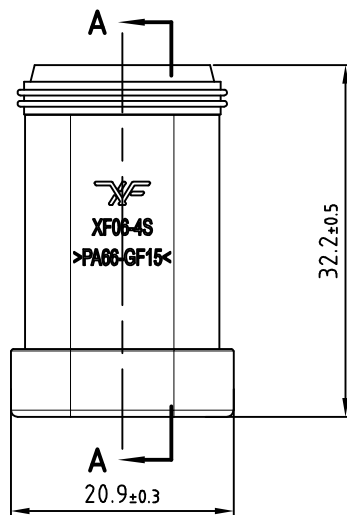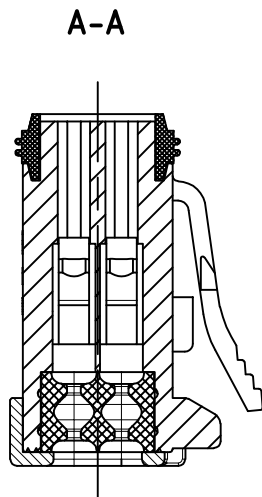

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO., LTD

设计	Lai	2025.7	标准化	
校对	Yang	2025.7		
审核	Zhang	2025.7	比例	2:1
未注公差: XX.X ±0.2;				

名称	连接件		
型号	XT06-4S-E003		
材料	PA66+GF15		
颜色	灰色		
重量			
阶段标记	版次	01	
A	页数		

A
B
C
D
E
F

F