

A
B
C
D
E
F

A

B

C

D

E

F

A
B
C
D
E
F

A

B

C








D

E

F

NOTES:

- 1.CURRENT RATING: 13A MAXIMUM.
2.OPERATING TEMPERATURE: -55℃ TO +125℃.
3.MOISTURE RESISTANCE:IP68,IP6K9K.
4.UL Flame Resistance Rating:UL-94 V0
5.Electrical characteristics:
Working voltage (VDC):250
Working voltage (VAC):250
Rated voltage configuration V):12 | 24 | 48

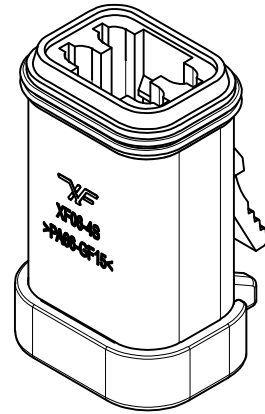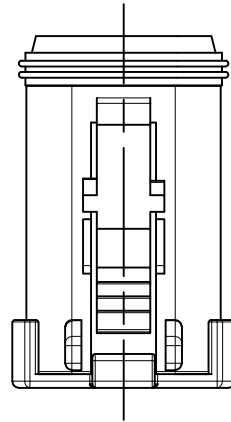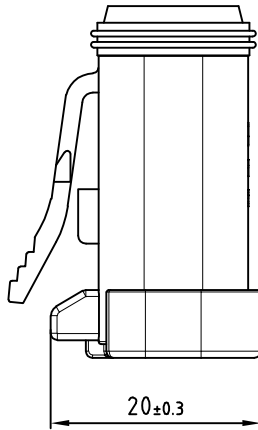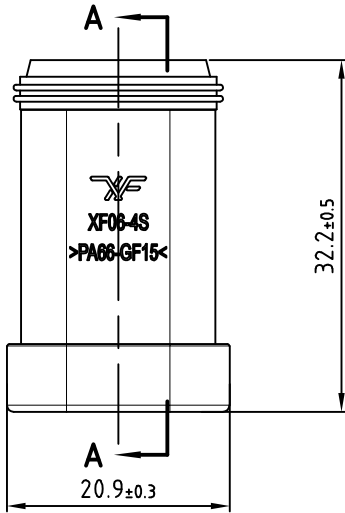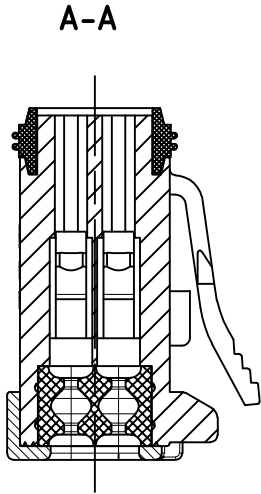

宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO., LTD

Design	Lai	2025.7	Revision	01
Proofread	Yang	2025.7		
Approval	Zhang	2025.7	Scale	2:1

Name	Connector
DrawingNo	XT06-4S-E005
Material	PA66+GF15
Color	Black
Weight Kg	
Pages	