

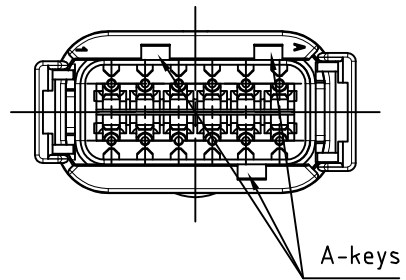
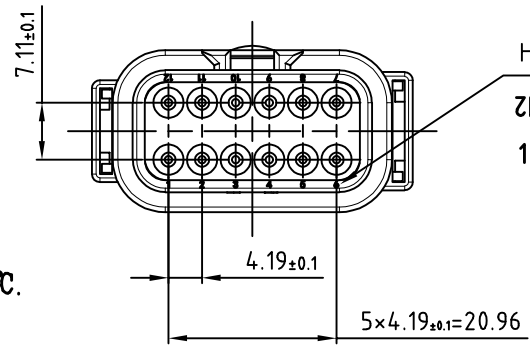
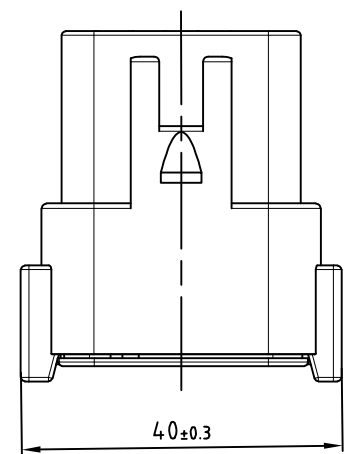
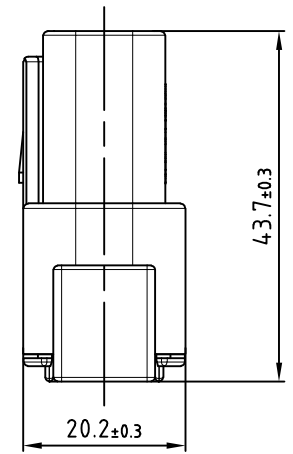


A
B
C
D
E
F

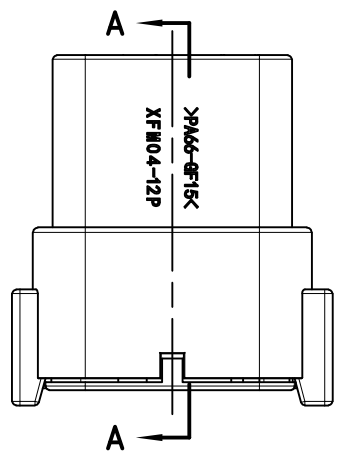


A-A

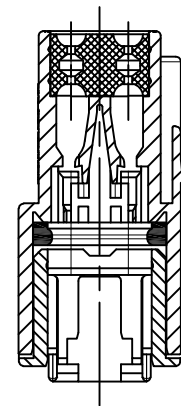

Hole sequence

2	1	1	0	1	6	8	L
1	2	3	4	5	6		



NOTES:

- 1.Rated current (maximum):7.5A.
- 2.Working temperature range: -55℃ TO +125℃.
- 3.Moisture resistance:IP68,IP6K9K.
- 4.UL Flame resistance rating:UL-94 V0
- 5.Electrical characteristics:
Working voltage (VDC):250
Working voltage (VAC):250
Rated voltage configuration (V):12 | 24 | 48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name		Connector	
					DrawingNo		XTM04-12PA	
					Material		PPA66+GF15	
					Design		Lai	
					2025.10		Revision	
					01		Color	
					Proofread		Yang	
					2025.10		Weight Kg	
					Approval		Zhang	
					2025.10		Scale	
					1.5:1		Pages	