



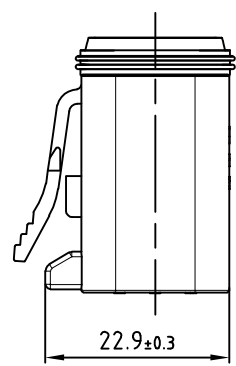
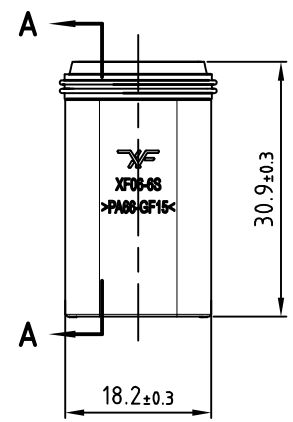
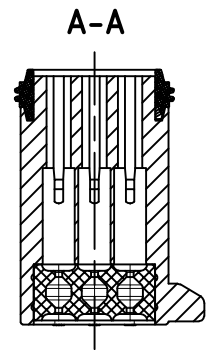


A
B
C
D
E
F

1 2 3 4 5 6 7 8



注:
1、端子额定电流(最大值)(A):13A
2、工作温度:-55℃~125℃
3、防水:IP68、IP6K9K
4、UL阻燃性等级:UL-94 V0
5、电气特征:工作电压(VDC):250
工作电压(VAC):250
标称电压架构(V):12|24|48

 宁波翔沔电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					名 称	连接件			
					型 号	XT06-6S-CE02			
					材 料	PA66+GF15			
设 计	Zhang	2025.7	标准化		颜 色	黑色			
校 对	Yang	2025.7			重 量				
审 核	Zhang	2025.7	比 例	1.5:1	阶段标记		版 次	01	
未注公差: XX.X ±0.2;					A			页 数	

1 2 3 4 5 6 7 8