








A
B
C
D
E
F

1 2 3 4 5 6 7 8

A
B
C
D
E
F

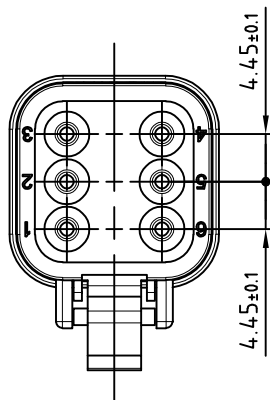

A-A

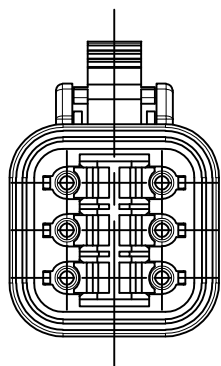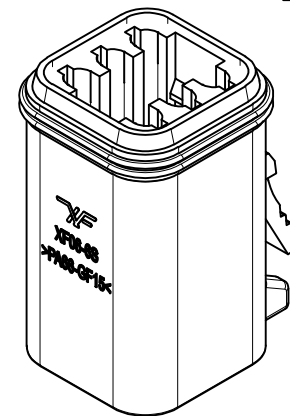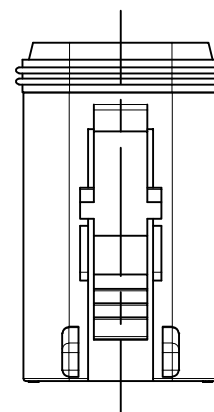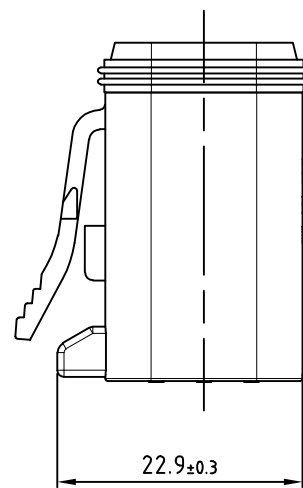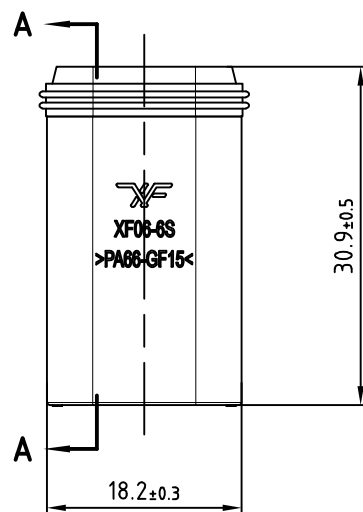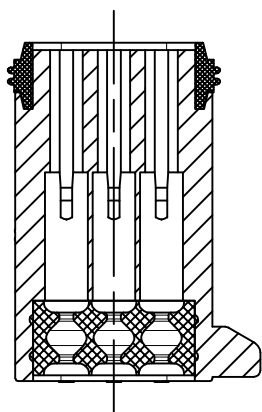

注:

- 1、端子额定电流(最大值)(A):13A
- 2、工作温度:-55℃~125℃
- 3、防水:IP68、IP6K9K
- 4、UL阻燃性等级:UL-94 V0
- 5、电气特征:工作电压(VDC):250

工作电压(VAC):250

标称电压架构(V):12|24|48

 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO., LTD					名称			连接件	
					型号			XT06-6S-CE06	
					材料			PA66+GF15	
设计	Lai	2025.7	标准化		颜色			黑色	
校对	Yang	2025.7			重量				
审核	Zhang	2025.7	比例	2:1	阶段标记		版次	01	
未注公差: XX.X ±0.2;					A		页数		

1 2 3 4 5 6 7 8