



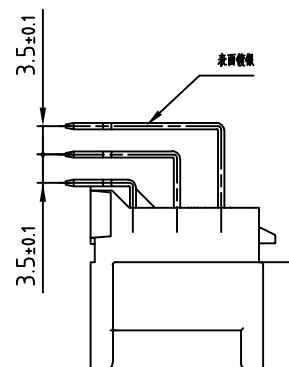
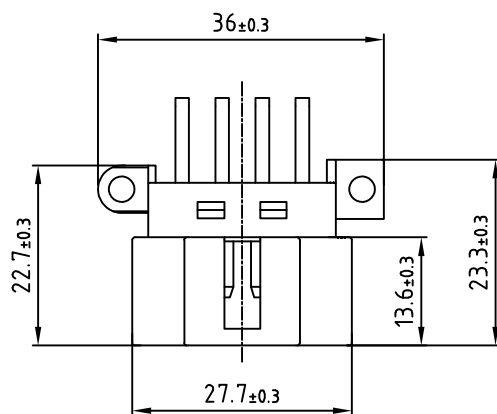
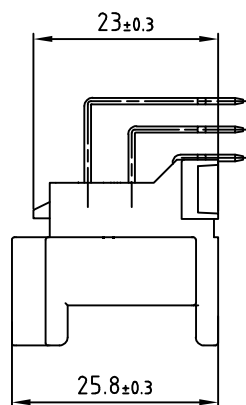


A
B
C
D
E
F

1 2 3 4 5 6 7 8

A
B
C
D
E
F



注:
1、工作温度:-40℃~120℃
2、UL阻燃性等级:UL-94 HB

 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					名称			连接件	
					型号			XF6-966140-3	
					材料			PA66+GF	
设计	Lai	2026.6	标准化		颜色			黑色	
校对	Yang	2026.6			重量				
审核	Zhang	2026.6	比例	1.5:1	阶段标记		版次	01	
未注公差: XX.X ±0.2;					A		页数		

1 2 3 4 5 6 7 8